


System No. C-AJ-0096

January 30, 2003
F Rating — 3 Hr
T Rating — 3 Hr
(UL/cUL)

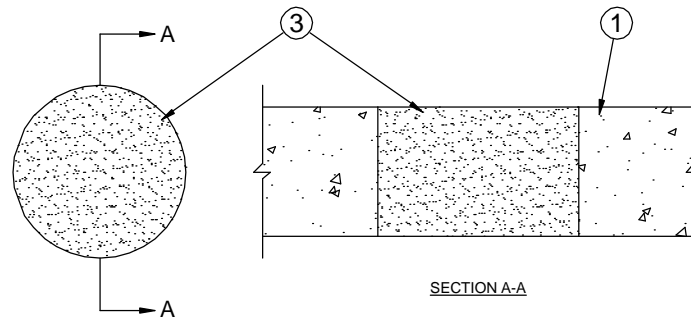

1. **Floor or Wall Assembly** — Min 4-1/2 in. thick reinforced lightweight or normal weight (100-150 pcf) concrete. Wall may also be constructed of any UL Classified **Concrete Blocks***. Max diameter of opening is 7 in.

See **Concrete Blocks** (CAZT) category in the Fire Resistance Directory for names of manufacturers.

2. **Forms** — (Not Shown, Optional) - Used as a form to prevent leakage of fill material during installation. Forms to be a rigid sheet material, fastened to underside of floor or both sides of wall. Forms may be removed after the fill material has cured.

3. **Fill, Void or Cavity Material* - Mortar** — Min 4-1/2 in. thickness of fill material applied within the annulus, flush with top surface of floor or with both surfaces of wall.

TREMCO INC — TREMstop Fire Mortar

*Bearing the UL Classification Mark



Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc.
Copyright © 2008 Underwriters Laboratories Inc. ®