

TREMCO STOCKED SETTING BLOCK PROGRAM

Now inventorying common sizes of rectangular setting blocks on a 4 day lead time

PROGRAM INCLUDES:


Silicone and EPDM setting blocks cut in 4" lengths

HOW TO FIND OUT MORE:

Contact your customer service representative or sales representative for updated pricing.

SHIP POINT:

Toronto and Cleveland, Ohio

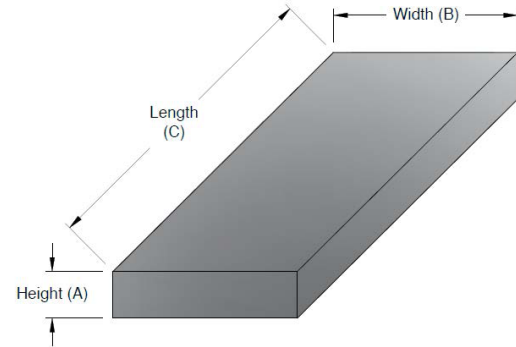

SILICONE 80 DUROMETER SETTING BLOCKS

MATERIAL CODE	DESCRIPTION	TREMCO PART NUMBER	BLOCK HEIGHT A		BLOCK WIDTH B		BLOCK LENGTH C		BLOCKS/CASE
			in	cm	in	cm	in	cm	
0020724SA4	1/16" x 1/2" x 4"	TR0724S	0.063	0.16	0.50	1.27	4.00	10.16	500
0021865SA4	1/16" x 1" x 4"	TR1865S	0.063	0.16	1.00	2.54	4.00	10.16	500
0021250SA4	1/16" x 1 1/8" x 4"	TR1250S	0.063	0.16	1.125	2.86	4.00	10.16	500
0020477SA4	1/8" x 1/2" x 4"	TR0477S	0.125	0.32	0.50	1.27	4.00	10.16	500
0021439SA4	1/8" x 1" x 4"	TR1439S	0.125	0.32	1.00	2.54	4.00	10.16	500
0021249SA4	1/8" x 1 1/8" x 4"	TR1249S	0.125	0.32	1.125	2.86	4.00	10.16	500
0021294SA4	1/4" x 1/2" x 4"	TR1294S	0.25	0.64	0.50	1.27	4.00	10.16	500
0020381SA4	1/4" x 1" x 4"	TR0381S	0.25	0.64	1.00	2.54	4.00	10.16	500
0020464SA4	1/4" x 1 1/8" x 4"	TR0464S	0.25	0.64	1.125	2.86	4.00	10.16	500

EPDM 85 DUROMETER SETTING BLOCKS

MATERIAL CODE	DESCRIPTION	TREMCO PART NUMBER	BLOCK HEIGHT A		BLOCK WIDTH B		BLOCK LENGTH C		BLOCKS/CASE
			in	cm	in	cm	in	cm	
0021865EA4	1/16" x 1" x 4"	TR1865E	0.063	0.16	1.00	2.54	4.00	10.16	500
0021439EA4	1/8" x 1" x 4"	TR1439E	0.125	0.32	1.00	2.54	4.00	10.16	500
0020381EA4	1/4" x 1" x 4"	TR1439E	0.25	0.64	1.00	2.54	4.00	10.16	500

PRODUCT	DESCRIPTION	BASIC USES
SILICONE SEALANTS		
Spectrem® 1	High-performance, single-component, moisture-cure, ultralow-modulus silicone sealant	Dynamically moving joints such as aluminum curtain walls, precast concrete panels, metal panels and window perimeters
Spectrem 2	High-performance, single-component, neutral-cure, medium-modulus silicone sealant for 2-sided structural glazing	Structural glazing (tensile and weather bead), window perimeters and general glazing applications (toe beads, heel beads and cap beads)
Spectrem 3	Single-component, neutral-cure, low-modulus, construction grade silicone sealant; non-staining with low polar attraction to dirt	Porous stone, EIFS, metal panels, masonry and pre-cast concrete joints
Spectrem 4-TS	Multi-component, neutral-cure, low-modulus silicone sealant; non-staining with low polar attraction to dirt; color flexibility with the opportunity to tint the material on site	For use in dynamically moving building joints with +/- 50% movement; EIFS, expansion/control, tilt-up panel, precast concrete panel joints; perimeter caulking
Proglaze® II	Multi-component, neutral-cure, high-modulus silicone sealant for 2- and 4-sided structural glazing	Structural glazing (tensile and weather bead), hurricane/impact and blast mitigation
Proglaze SSG	Single-component, neutral-cure, high-modulus silicone sealant for 2- and 4-sided structural glazing	Structural glazing (tensile and weather bead), hurricane/impact and blast mitigation
Proglaze	Single-component, moisture-cure, acetoxysilicone sealant for a variety of in-field and in-plant glazing applications	Cap bead, toe bead, heel beads and metal-to-metal joinery
Tremsil® 600	Single-component, neutral-cure, fast-skinning, medium-modulus silicone sealant for in-plant structural glazing	Back-bedding; cap, heel and toe beads; sash joinery
GLAZING TAPES		
Tremco® 440 Tape	100% solid polyisobutylene cross-linked butyl, preformed sealant	Non-compression glazing; metal-to-metal lap seals
Polyshim® II Tape	100% solids, cross-linked butyl preformed tape with a continuous integral EPDM shim	Compression glazing systems and spacer for structural silicones
SGT-900 Series	Open cell, high-density polyurethane foam tapes with a micro-cellular structure; PSA on one or both sides	Spacer for structural glazing systems
Tremco ET675	100% solid, cross-linked, extruded butyl tape; non-oxidizing, non-film forming; provides exceptional flow resistance when subjected to vibration	Concrete to concrete seals, glass to metal seals, separate dissimilar metals to prevent galvanic action, and roof and side panel lap joints
TRANSITIONS		
Proglaze ETA	Patented, pre-engineered silicone materials used as transition assembly between the window or wall system and adjacent air and vapor barrier materials	Connection from window or curtain wall system to wall; transitions where spanning of voids is commonplace such as expansion joints, seismic joints, or other locations where movement is anticipated
ExoAir® LEF	Single-component, moisture-curing, gun-grade polyurethane foam	Windows and door perimeters and as an effective joint filler in hidden applications
ExoAir Flex Foam	Single-component, moisture-cure, gun-grade polyurethane flexible foam; performs as a thermal and sound barrier; industry leading movement range of +/-15%	Windows and door perimeters
Willseal® 600	Pre-compressed, self-expanding, flexible, polyurethane joint sealant; seals against wind-driven rain, sound, draft and dirt	Expansion joints between tilt-up panels; joints in pre-cast concrete, masonry and brick façades, metal roofing panels, EIFS

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com
 Willseal | 34 Executive Drive | Hudson, NH 03051 | 800.274.2813 | willseal.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.



Tremco®, Spectrem®, Proglaze®, Tremsil®, Polyshim® and ExoAir® are registered trademarks of Tremco Incorporated. Willseal® is a registered trademark of Schul International Co. Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office. 0621/SBSS