


TL/PV 120-10

F-Rating - 2 hr

T Rating - 2 hr for Condition A

T-Rating - 1/4 hr for Condition B

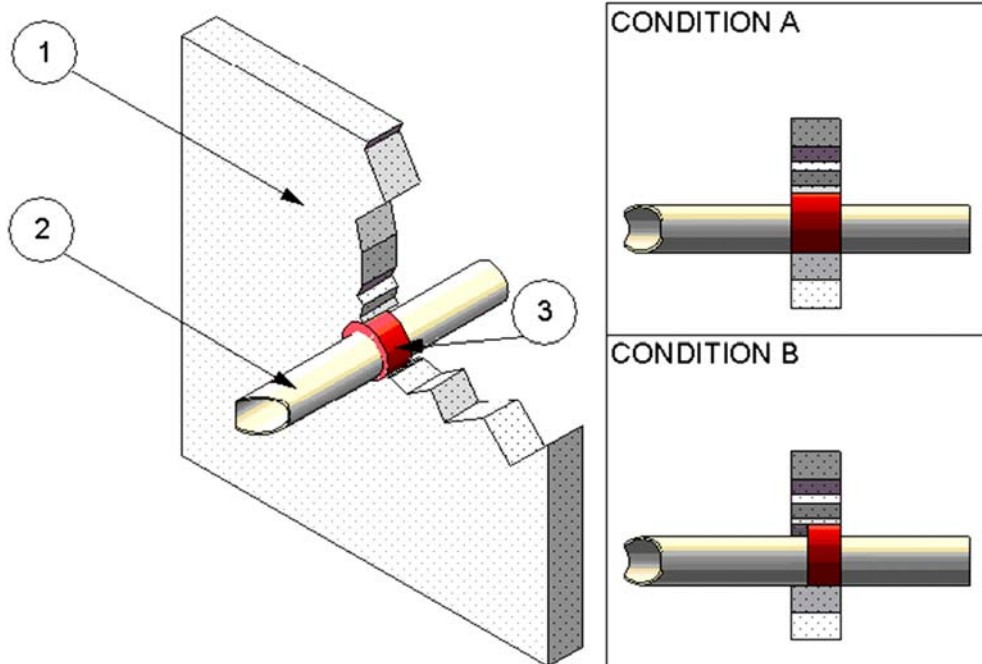

1. **WALL ASSEMBLY** - Use a 2 hour fire-rated wall assembly consisting of minimum 4-1/2 inch thick light weight or normal weight (100-150 pcf) reinforced concrete or similarly rated masonry units. Create a through-opening with diameter of 6 inch.
2. **PENETRATING ITEM** - Eccentrically position in the opening made in the Wall Assembly (Item 1) a nominal 4 inch diameter Schedule 40 cellular core PVC pipe for use in vented or closed piping system. Establish an annular space between the Penetrating Item (Item 2) the edge of the opening in the Wall Assembly (Item 1) ranging from minimum ½ inch to maximum 1 inch.
3. **FILL, VOID OR CAVITY MATERIAL** - Apply the following materials in the annular space between the Wall Assembly (Item 1) and the Penetrating Item (Item 2). Sealant - Apply sealant as follows:
 - A. **Condition A** - Apply a minimum 3 inch depth of sealant material to both sides of the wall, flush to both faces of the Wall Assembly (Item 1) in the annular space between the Wall Assembly (Item 1) and the Penetrating Item (Item 2). When the Wall Assembly (Item 1) is less than 6 inches thick, apply the sealant material to fill in the entire annular space between the Wall Assembly (Item 1) and the Penetrating Item (Item 2) throughout the wall cavity to the thickness of the Wall Assembly (Item 1).
 - B. **Condition B** - Apply a minimum 3 inch depth of sealant material flush with one side of the Wall Assembly (Item 1) in the annular space between the Wall Assembly (Item 1) and the Penetrating Item (Item 2).

CERTIFIED MANUFACTURER: Tremco, Inc.

CERTIFIED PRODUCT: Sealant

MODEL: TREMstop IA+



Reproduced courtesy of Intertek Testing Services. Copyright © 2008 Intertek Testing Services Inc.

Tremco Commercial Sealants & Waterproofing

3735 Green Road, Beachwood, OH 44122 // Phone: 216.292.5000 // 800.321.7906
 220 Wicksteed Avenue, Toronto, ON M4H 1G7 // Phone: 416.421.3300 // 800.363.3213
 1451 Jacobson Avenue, Ashland OH 44805 // Phone: 419.289.2050 // 800.321.6357