

# Paragranular™


## Cove Forming & Void Filling Granular Bentonite



**Product Description:**  
Paragranular is a premium, Wyoming type, high swelling, granular, sodium bentonite. When in the presence of water, Paragranular reacts and forms an impervious waterproof gel.

**Basic Uses:**  
Paragranular is designed to work in conjunction with Paraseal products to form a waterproof transitional seal. It is used to form a cove at all horizontal to vertical transitions, at floor/wall transitions and penetrations through horizontal surfaces, and to fill voids around irregularities.

**INSTALLATION**  
**Preparatory Work:**  
Remove debris from footing or other horizontal/vertical transition area to receive Paragranular.

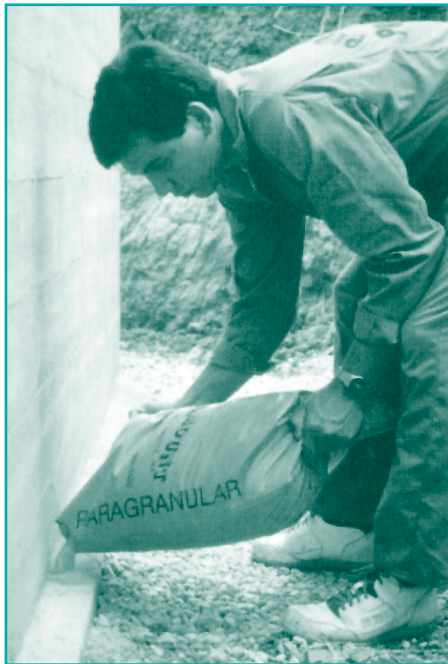

**Procedure:**  
Cut corner of the bag to pour a continuous cove of Paragranular. See specifications for the amount to use. One bag (50 lbs.) should typically cover approximately 30-50 linear feet forming a 1 1/2" cove. Immediately install Paraseal over the cove and nail with proper amount of fasteners.

**Storage:**  
Paragranular is packaged in waterproof polyethylene bags, however, care should be used to prevent job-site damage from workers or inclement weather.

**Availability:**  
Immediately available from distributors worldwide.

**Warranty:**  
Tremco warrants its Paraseal Products to be free of defects in materials, but makes no warranty as to appearance or color. Since methods of application and on site conditions are beyond our control and can affect performance, Tremco makes no other warranty, expressed or implied, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE, with respect to Paraseal Products, sole obligation shall be, at its option, to replace, or to refund the purchase price of the quantity of Paraseal Products proved to be defective and Tremco shall not be liable for any loss or damage.

### TECHNICAL DATA

#### Physical Properties:

SiO <sub>2</sub>	61.3%	K <sub>2</sub> O	0.4%
Al <sub>2</sub> O <sub>3</sub>	19.8%	Na <sub>2</sub> O	2.2%
Fe <sub>2</sub> O <sub>3</sub>	3.9%	TiO <sub>2</sub>	0.1%
MgO	1.3%	Trace Elements	3.2%
CaO	0.6%	H <sub>2</sub> O (Crystal)	6.5%

#### Typical Screen Analysis

% on U.S. 20 Mesh	35.1
% on U.S. 30 Mesh	56.1
% on U.S. 40 Mesh	6.1
% on U.S. 50 Mesh	1.4
% on U.S. 70 Mesh	0.6
% on U.S. 100 Mesh	0.2
% on U.S. 140 Mesh	0.2
% on U.S. 200 Mesh	trace
Pan	0.2
H <sub>2</sub> O	6.0-9.0%
Grit Content (% on Wet U.S. 325 Mesh Sieve)	5.0 max.
pH	8.9-10.5
Weight	60 lbs. per cu. ft.
Specific Gravity	2.7

For MSDS and Spec Data Sheets,  
Call our 24 Hour Fax-Back Line:

**1-800-551-2806**

or visit our website:

[www.tremcosealants.com](http://www.tremcosealants.com)

**TREMCO** INCORPORATED

Sealant/Weatherproofing Division  
Tremco • Mameco/Vulkem® • Paramount

3735 Green Road • Beachwood, Ohio • 44122 • Phone: (216) 292-5000 • (800) 321-7906  
220 Wicksteed Avenue • Toronto, ON M4H 1G7 • Phone: (416) 421-3300 • (800)363-3213

An **RPM** Company

