


TREMproof 6100 with embedded reinforcing fabric as specified

TREMDrain

Elastomeric Sheeting embedded in TREMproof 6100, centered over joint

Tremco Protection Course

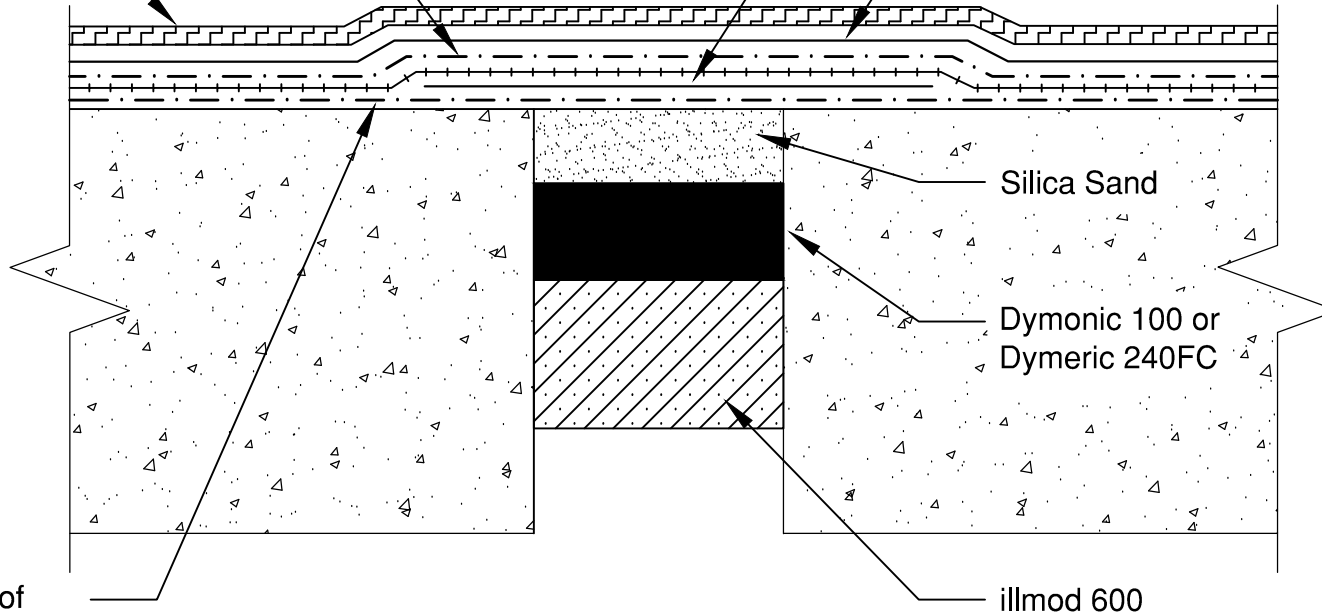

Detail Coat of TREMproof 6100

Silica Sand

Dymonic 100 or Dymeric 240FC

illmod 600

Rev # 00

File Name: 12105

Sheet Number:

Date: 1/14/2013

Project: Hot Applied
Detail: Treatment of Floor to Floor Joints with Sealant

Scale: None
Checked by: EH

Drawn by: KAB

Notes: Tremprime QD or another Tremco approved primer must be applied before the application of TREMproof 6100

When a back-up seal with illmod 600 is not required, a closed cell backer rod can be utilized. Please consult your local Tremco Sales or Technical Service Representative.

This detail is intended for conceptual purposes only.

Rev	Date	Description	By
-	-	-	-

TREMCO
www.tremcoscalants.com

3735 Green Road • Beachwood, OH 44122
Phone : 866-209-2404 • Fax : 216-766-5535