


Dymonic 100, minimum 1/4" contact on surface of pipe and face of panel

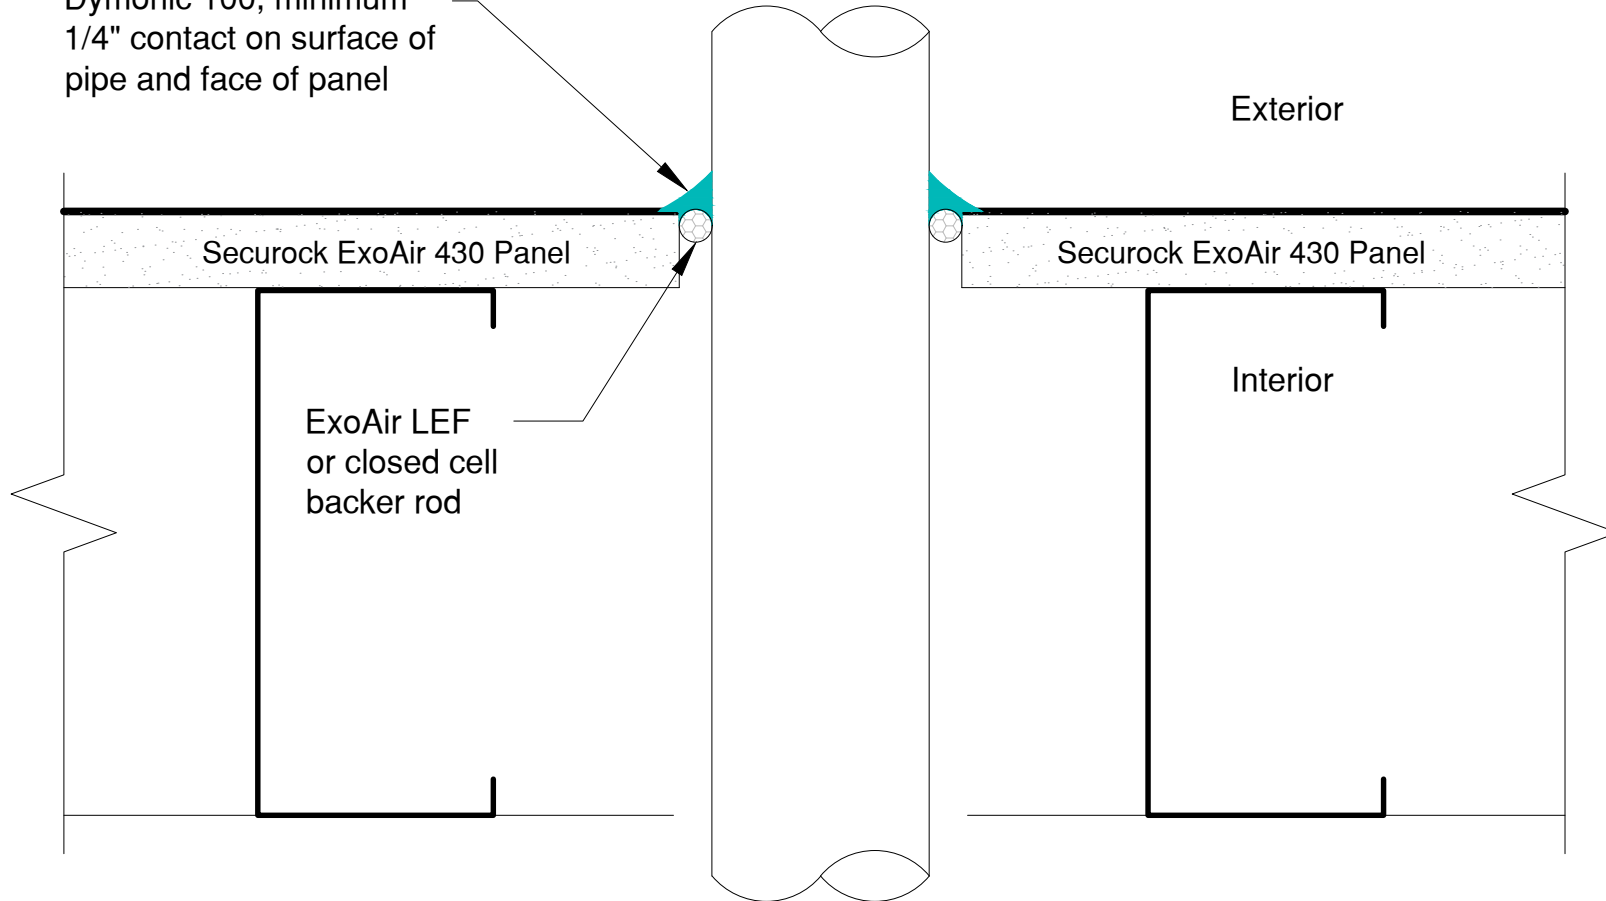

NOTES:

- Spectrem 1 is an alternate to Dymonic 100, but can not be used with an adhesively applied cladding
- No backing required at conditions with 0-1/4" of annular space

See securockexoair.com for the most up-to-date product information

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters. The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.



PERFORMANCE BUILT IN
www.securockexoair.com

United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

USG Technical & Customer Support:
800.USG.4YOU (874-4968)

Tremco Commercial Sealants & Waterproofing
3735 Green Road
Beachwood, OH 44122

Tremco Technical Support:
866.209.2404

SECUROCK® ExoAir® 430 Panel

Project:
Detail: Non-Rated Wall Penetration

Drawn by: KAB

Approved by: DM

Scale: NTS

File Name:
12887

Rev #
00

Date: 2/7/2017