



# Tremco® EnerSEAL™ JS 562

## Insulating Glass Sealant, Two Part Silicone

### Product Description

Tremco® EnerSEAL™ JS 562 Silicone Insulating Glass Sealant is a two-part, high modulus, silicone sealant.

### Basic Uses

EnerSEAL JS 562 is intended to be used as a secondary silicone sealant in a dual-sealed insulating glass unit. The primary seal typically being polyisobutylene mastic or product capable of providing the required vapor seal for the insulating glass unit.

### Equipment Consideration

The EnerSEAL JS 562 base material utilizes similar dispensing equipment as other two-part sealants. Curing agent hoses must be a type to reduce MVT through the walls of the delivery hoses.

### Availability

Immediately available from your local Tremco Sales Representative, Tremco Distributor or Tremco Warehouse.

### Packaging

The EnerSEAL JS 562 base material is available in 55-gal (208-L) straight wall drums with polyethylene liner for easy disposal; the curing agent is packaged in a 5-gal (18.9-L) container.

### Limitations

Must confirm compatibility with glazing components and other building materials which may make contact with the edge seal.

Continuous water immersion.

In contact or exposed to sealants that liberate acetic acid.

### Substrate Preparation

**Glass** - To obtain proper adhesion, the surfaces must be thoroughly cleaned with mild non-sudsing, non-film forming detergent and flushed with clean hot water to remove all traces of detergent. Glass surface must be dry and free of any contaminants or fingerprints.

**Metal** - To obtain proper adhesion, metal spacer must be free of any mill oils, oxidation or other contaminants.


### Application

Insulating glass units intended for conventional dry glazing or residential window applications should be designed with the secondary sealant dimensions in accordance with the "Sealant Manufacturers Minimum Sealant Dimensions and Placement Survey," TB-1201-89(91) distributed by the Insulating Glass Manufacturers Association (IGMA). For information on

IGMA's recommendation for glazing, write; IGMA, 2319 St. Laurent Blvd., Unit 500, Ottawa, Ontario K1G 4J8 (Canada). For recommendations on specific glazing designs or glazing compounds, contact your local Tremco Representative.

Insulating glass units intended for structural silicone glazing applications should follow secondary seal design depths as determined by ASTM C 1249 - Standard Guide for Secondary Seal for Sealed Insulating Glass Units for Structural Sealant Glazing Applications.

It is recommended that adhesion and compatibility testing be performed prior to sealant use. If requested, Tremco may provide assistance in performing adhesion testing to coated glass or spacer surfaces before using JS 562 in production quantities.

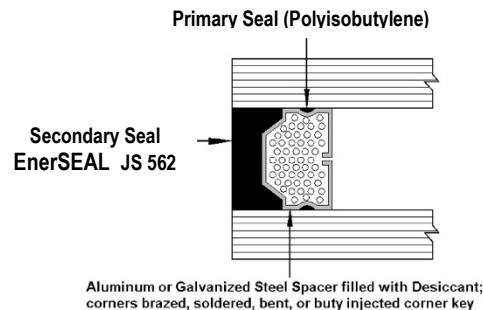

### Clean Up

Equipment and tools should be cleaned immediately after use with aromatics, such as Toluene or Xylene. See the equipment manufacturer's recommendations for specific application and use of cleaning systems; i.e., purgeless and base or solvent purge.

### Warranty

Tremco warrants its Products to be free of defects in material but makes no warranty as to appearance or color. Since methods of application and on-site conditions are beyond our control and can affect performance, Tremco makes no other warranty, expressed or implied, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE, with respect to Tremco Products. Tremco's sole obligation shall be, at its option, to replace or refund the purchase price of the quantity of Tremco Products proven to be defective, and Tremco shall not be liable for any loss or damage.

Please refer to our website at [www.tremcosealants.com](http://www.tremcosealants.com) for the most up-to-date Product Data Sheets.

NOTE: All Tremco Safety Data Sheets (SDS) are in alignment with the Globally Harmonized System of Classification and Labelling of Chemicals (GHS) requirements.

**TYPICAL PHYSICAL PROPERTIES**  
**EnerSEAL JS 562 Insulating Glass Sealant- Two Part Silicone**  
 Mix ratio 12:1 by volume, 15.2 to 1 by weight

PROPERTY	TEST METHOD	TYPICAL VALUES
Specific Gravity – Base (Color White)	Gravimetric	1.32
Curative (Color Black)	Gravimetric	1.04
Weight per gal (lb/gal) Base		11.0 lb/gal
Weight per gal (lb/gal) Curative		8.3 lb/gal
Sag (slump)	ASTM C639	Nil
Snap Time 12:1 ratio As Cured: After 14 days at 77° F (25°C), 50% RH	Tremco 521-3	35 to 45
Tack Free Time	ASTM C679	90 to 120 min
Cyclic Movement	ASTM C719	+/- 25%
Hardness (Shore A)	ASTM C661	40
Maximum Elongation	ASTM D412	350 to 400%
Tensile Strength at 25% Elongation	ASTM C1135	0.34 to 0.35 MPa (50 psi)
Tensile Strength at Max Elongation As Cured: After 21 days at 77° F (25°C), 50% RH	ASTM D412	250 to 275 psi
Ultimate Tensile Strength	ASTM C1135	140 to 150 psi
Ultimate Elongation	ASTM C1135	250 to 300%

**0326/JS562DS-ST**

3735 Green Rd  
 Beachwood OH 44122  
 216.292.5000 / 800.321.7906

1451 Jacobson Ave  
 Ashland OH 44805  
 419.289.2050 / 800.321.6357

220 Wicksteed Ave  
 Toronto ON M4H1G7  
 416.421.3300 / 800.363.3213

1445 Rue de Coulomb  
 Boucherville QC J4B 7L8  
 514.521.9555

**Tremco Commercial Sealants & Waterproofing**

