

ENERSEAL® 340R

Reactive Hot Melt IG Perimeter Sealant


Product Overview

EnerSEAL® 340R reactive warm-applied sealant is a modified polyurethane IG perimeter barrier sealant that combines the ease of handling and speed of a single-component hot melt with the shear and heat resistance of a reactive polyurethane.

Features & Benefits

- Single component & solvent free
- No mixing process required, hence no waste
- Suitable with both manual gunning and automatic applications
- Can be used in single seal or dual seal applications
- Warm-applied for ease of application and corner-closing
- Fast-setting for immediate IG handling and timely glazing of IG units
- Cures in the presence of moisture vapor; large strength gains in 24 hours
- Lower moisture vapor transmission rate than typical two-component thermosetting sealants and leading competitive reactive hot melts

PART NUMBER	COLOR	PACKAGING
ENHM340R 855	Black	46 US Gallons Filled in a 55 Gallon Drum

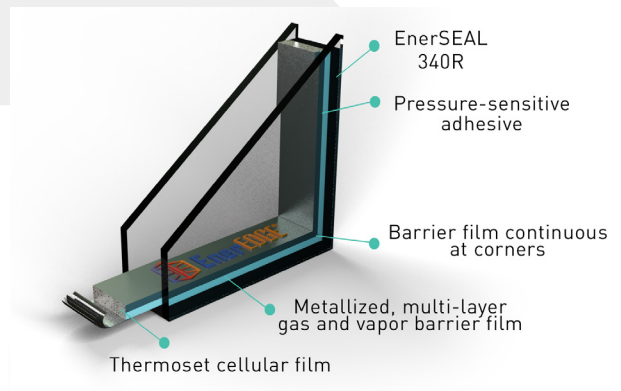

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.

Tremco® and EnerSEAL® are registered trademarks of Tremco Incorporated. Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

1220/ES340RSS

 **TREMCO**
Construction Products Group

tremcocpg.com