


EnerSEAL™ 332

Hot Melt Butyl IG Perimeter Sealant



Your inside edge to performance and savings.

EnerSEAL™ 332 is a butyl-based hot melt sealant, especially formulated as an applied perimeter sealant used to fabricate insulating glass units. EnerSEAL 332 is the recommended sealant for use with Tremco's EnerEDGE® warm-edge spacer for maximum moisture protection as part of the complete EnerEDGE insulating glass system.

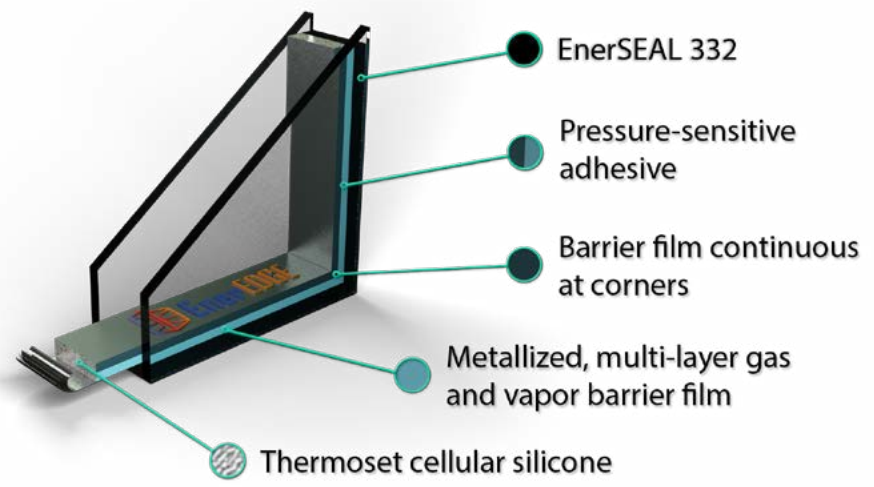

PART NUMBER	COLOR	PACKAGING
ENHM332B 855	Black	48-gal drum

FEATURES & BENEFITS

- Sealant maximizes insulating glass unit life when used in conjunction with the EnerEDGE warm-edge spacer by controlling and substantially preventing premature moisture penetration into the airspace
- Very low water vapor permeability for long life and extended fill-gas retention; rate is < 0.1 g/(m².24hr.2mm)
- Excellent adhesion to glass, aluminum, galvanized steel and common foam spacer moisture barrier films
- Single component, no mixing required
- No purge waste upon application
- Solvent free – 100% solids
- Suitable with both manual gunning and automatic application technologies
- Neat corner manufacturing
- Fast setting for immediate handling and timely glazing of insulating glass units
- Increase your edgeseal system's reliability and warranty when EnerSEAL 332 is used in conjunction with EnerEDGE warm-edge spacer



CLEAN FINISH



EXAMPLE OF AUTOMATED APPLICATION

3735 Green Road
Beachwood, OH 44122
216.292.5000 • 800.321.7906

1451 Jacobson Avenue
Ashland, OH 44805
800.321.6357

220 Wicksteed Avenue
Toronto, ON M4H 1G7
416.421.3300 • 800.363.3213

