


Waterproofing Membrane Layer Under Asphalt

Single Tack Coat Layer

Layer	Material	Application Rate	Thickness
① Primer on substrate ¹ Broadcast aggregate	Matacryl Primer CM Quartz 0.3 to 0.7 mm	0.3 to 0.5 kg/m ² 0.3 kg/m ²	13 to 20 mils
② Membrane ² (1 or 2 layers)	Matacryl Manual / Matacryl Manual LM Matacryl Machine / Matacryl Machine LM	Minimum 2.8 kg/m ²	Minimum 80 mils
③ Tack Coat Broadcast aggregate	Matacryl STC Quartz 2.0 to 3.5 mm	0.5 to 1.0 kg/m ² 1.0 to 2.0 kg/m ²	20 to 40 mils

¹ Porous or uneven substrates may require multiple primer coats

² Membrane application rate/thickness: min 2.8 kg/m² (80 mils) for single layer; min 1.4 kg/m² each (40 mils each) for two layers

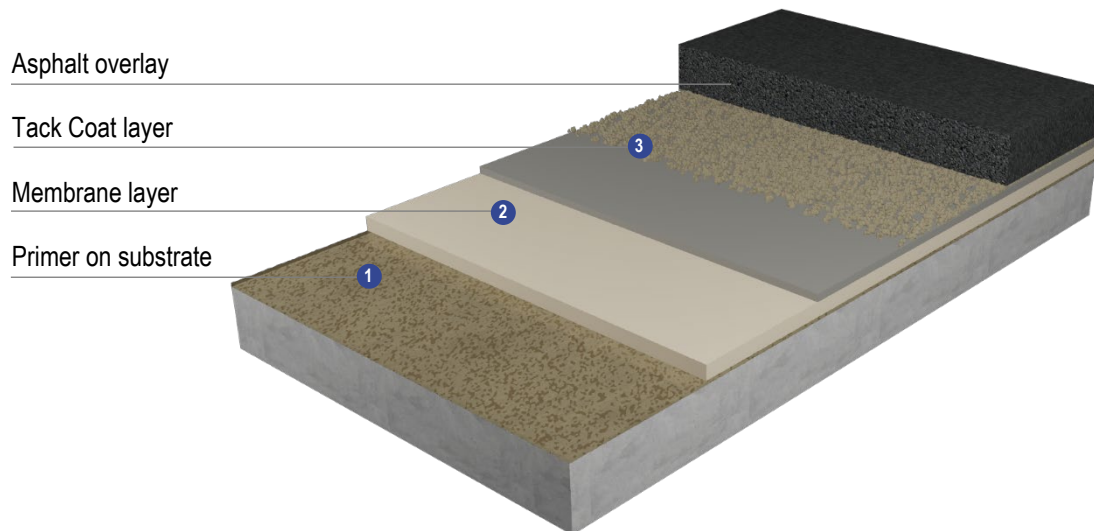

Matacryl WPM Systems are certified compliant with HAPAS requirements for performance and durability – Guidelines for the Assessment and Certification of Waterproofing systems for Use on Concrete Decks of Highway Bridges Sections 5 and 8 by the British Board of Agrément.


Waterproofing Membrane Layer Under Asphalt

Double Tack Coat Layer

Layer	Material	Application Rate	Thickness
① Primer on substrate ¹ Broadcast aggregate	Matacryl Primer CM Quartz 0.3 to 0.7 mm	0.3 to 0.5 kg/m ² 0.3 kg/m ²	13 to 20 mils
② Membrane ² (1 or 2 layers)	Matacryl Manual / Matacryl Manual LM Matacryl Machine / Matacryl Machine LM	Minimum 2.8 kg/m ²	Minimum 80 mils
③ Tack Coat Broadcast aggregate	Matacryl STC Quartz 0.3 to 0.8 mm	0.3 to 0.5 kg/m ² Minimum 1.0 kg/m ²	13 to 20 mils
④ 2 nd Tack Coat	Matacryl Tack Coat No. 1	0.6 to 1.0 kg/m ²	24 to 40 mils

¹ Porous or uneven substrates may require multiple primer coats

² Membrane application rate/thickness: min 2.8 kg/m² (80 mils) for single layer; min 1.4 kg/m² each (40 mils each) for two layers

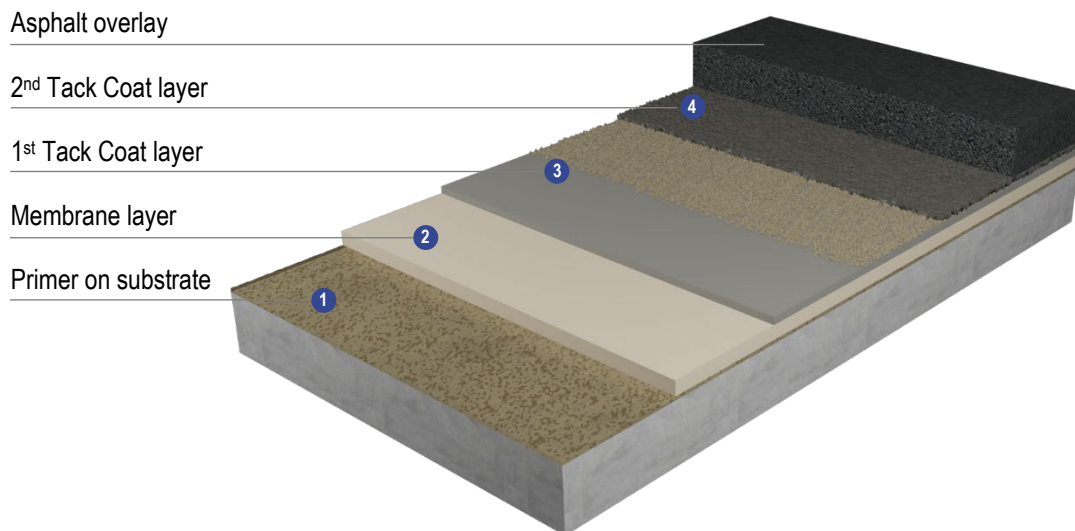

Matacryl WPM Systems are certified compliant with HAPAS requirements for performance and durability – Guidelines for the Assessment and Certification of Waterproofing systems for Use on Concrete Decks of Highway Bridges Sections 5 and 8 by the British Board of Agrément.