



Tremco offers a broad selection of coatings for vehicular, pedestrian and speciality applications.



Vulkem[®] EWS Helipad System

Benefits

- Minimal downtime (approximately 30 - 45 min.) between application coats, even in cold temperatures.
- Open to traffic within one hour after application completion.
- Polyurethane-methacrylate (PUMA) technology delivers extreme durability, decorative functionality and crack bridging capabilities.
- Can be applied at temperatures as low as 20° F / -7° C. For applications below 20° F / -7° C, Tremco PUMA Cold Weather Catalyst can be added.

HIGH-WEAR SYSTEMS

VULKEM® EWS FOR HELIPAD APPLICATIONS - BEFORE AND AFTER




Surface Prior to Application



Surface During Installation

VULKEM® EWS FOR HELIPAD SYSTEM

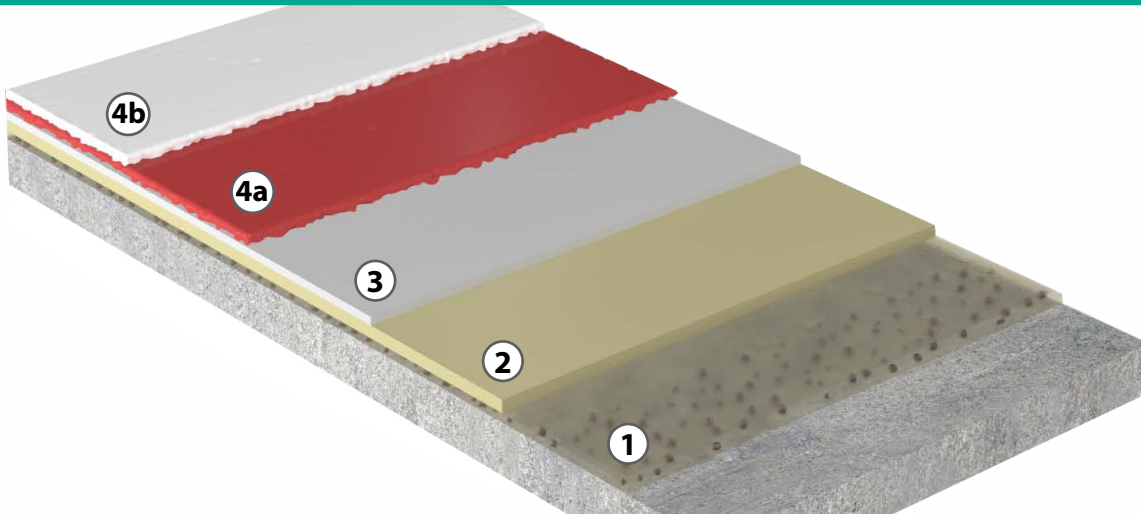

Product	Coverage Rate	Min. Wet Mil	Comments
1 Tremco PUMA Primer	90 ft ² /gal	17	Broadcast 30 to 50 mesh silica sand at a rate of 7 lb per 100 ft ² into wet primer.
2 Tremco PUMA BC	20 ft ² /gal	80	Allow 45 minutes to cure before proceeding.
3 Tremco WC with PUMA filler powder	25 ft ² /gal	65	Broadcast 16 to 30 mesh silica sand to refusal. Allow 45 minutes to cure before proceeding.
4a Tremco PUMA TC	64 ft ² /gal	25	Allow 30 minutes to cure.
4b Tremco PUMA TC	64 ft ² /gal	25	Allow 60 minutes to cure before opening to traffic.

Information may vary by region. For specific information, please contact your local Tremco representative.