

Tremco offers a broad selection of coatings for vehicular, pedestrian and specialty applications.



## Vulkem® EWS Pedestrian System

### Basic uses

- Stadiums
- Balconies
- Pool Decks

### Benefits


- Minimal downtime (approximately 30 - 45 min) between application coats, even in cold temperatures.
- Open to foot traffic within one hour after application completion.
- Polyurethane-methacrylate (PUMA) technology delivers extreme durability, decorative functionality and crack bridging capabilities.
- Can be applied at temperatures as low as 20 °F/-7 °C. For applications below 20 °F/-7 °C, Tremco PUMA Cold Weather Catalyst can be added.

# HIGH-WEAR SYSTEMS

## VULKEM® EWS PEDESTRIAN SYSTEM



## VULKEM® EWS PEDESTRIAN SYSTEM

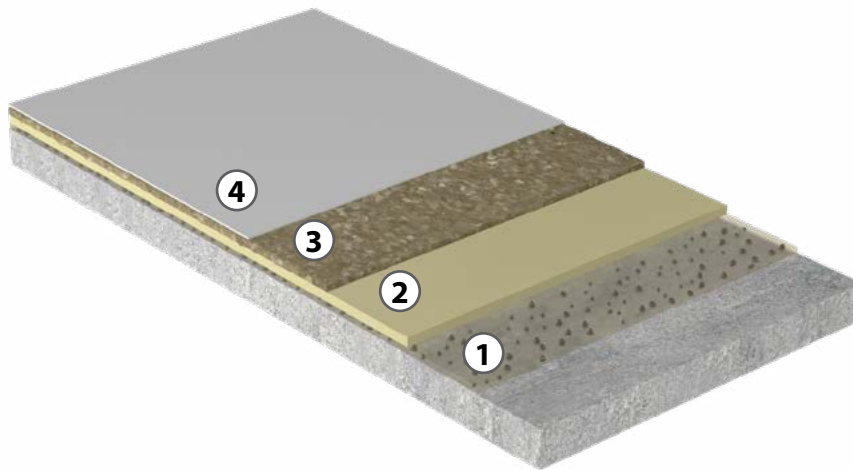

Product	Coverage Rate	Wet Mils	Comments
1 Tremco PUMA Primer	90 ft <sup>2</sup> /gal	17	Broadcast 30 to 50 mesh silica sand at a rate of 7 lb per 100 ft <sup>2</sup> into wet primer.
2 Tremco PUMA BC	26 ft <sup>2</sup> /gal	60	Allow 45 minutes to cure before proceeding.
3 Tremco PUMA TC	80-90 ft <sup>2</sup> /gal	17-20	Broadcast silica sand to refusal into wet TC. Allow 45 minutes to cure before proceeding.
4 Tremco PUMA TC	53-64 ft <sup>2</sup> /gal	25-30	Allow 45 minutes to cure before opening to traffic.

Information may vary by region. For specific information, please contact your local Tremco CSW representative.