


ExoAir 110 or 110AT

Dymonic 100  
termination bead

ExoAir TWF or 110AT,  
recessed  $\frac{1}{2}$ " from exterior

ExoAir 110 or 110AT

Spectrem 1

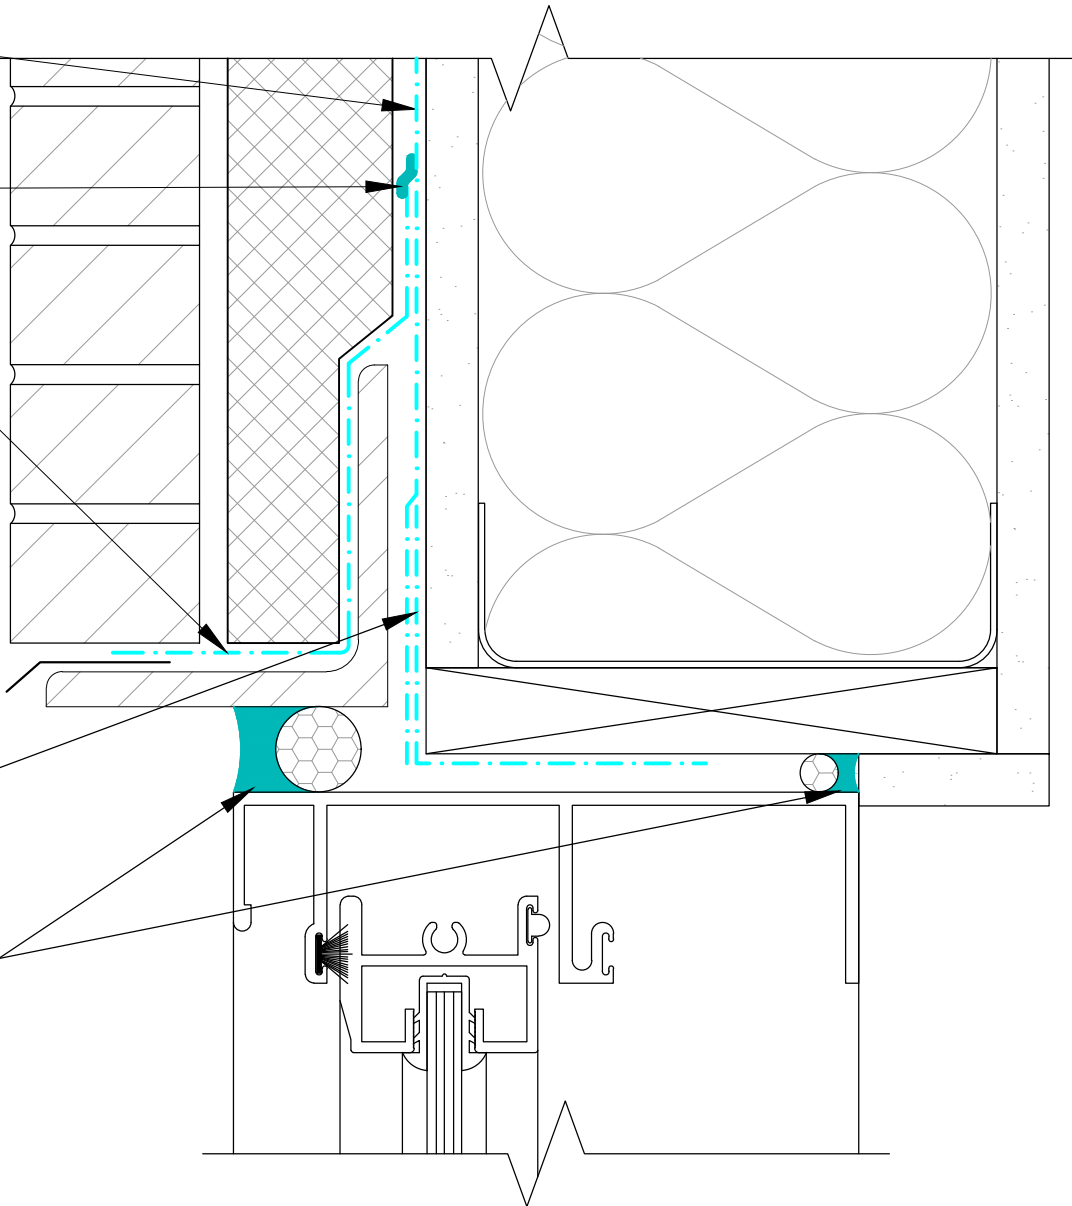

Notes: ExoAir Primer must be used with ExoAir 110 and ExoAir TWF

**TREMCO**

www.tremcosealants.com

3735 Green Road \* Beachwood, OH 44122

Phone : 866-209-2404 \* Fax: 216-766-5535

Project:

Detail: Brick Lintel - Impermeable Sheet - Sheet Flashing

Sheet Number:

File Name:

AVB-SI-S-BL-01

This detail is intended for conceptual purposes only.

Drawn by: KAB

Checked by: MAT

Scale: None

Date: 12/21/2018