

ENERSEAL® JS780S

Polyisobutylene IG Primary Sealant for Desiccated Foam Spacers


Product Overview

EnerSEAL® JS780S is a one-component polyisobutylene-based primary insulating glass sealant, specially developed for the manufacturing of IG units. EnerSEAL JS780S is a recommended sealant for use along with a secondary sealant with warm edge D or T shaped spacers.

Features & Benefits

- Flexible at low temperatures
- High ultraviolet resistance
- Very good adhesion to glass and polymeric warm-edge spacer barrier films
- Non-fogging
- Extremely low moisture and gas permeability rates
- Easy to use

PART NUMBER	COLOR	PACKAGING
ENPIB780S 801	Black	7 kg cartons

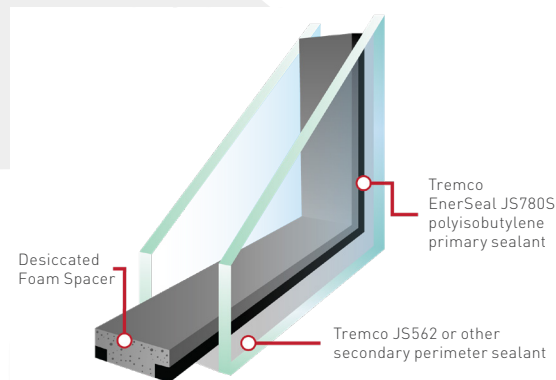

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco CPG Inc. and its Dryvit and Nudura brands; Willseal; Prebuck LLC; Tremco Barrier Solutions, Inc.; Weatherproofing Technologies, Inc. and its Pure Air Control Services and Canam Building Envelope Specialists offerings; and Weatherproofing Technologies Canada, Inc.

 **TREMCO**
Construction Products Group

Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.
© Tremco CPG Inc. 2022

0922/ESJS780SSS

tremcocpg.com