


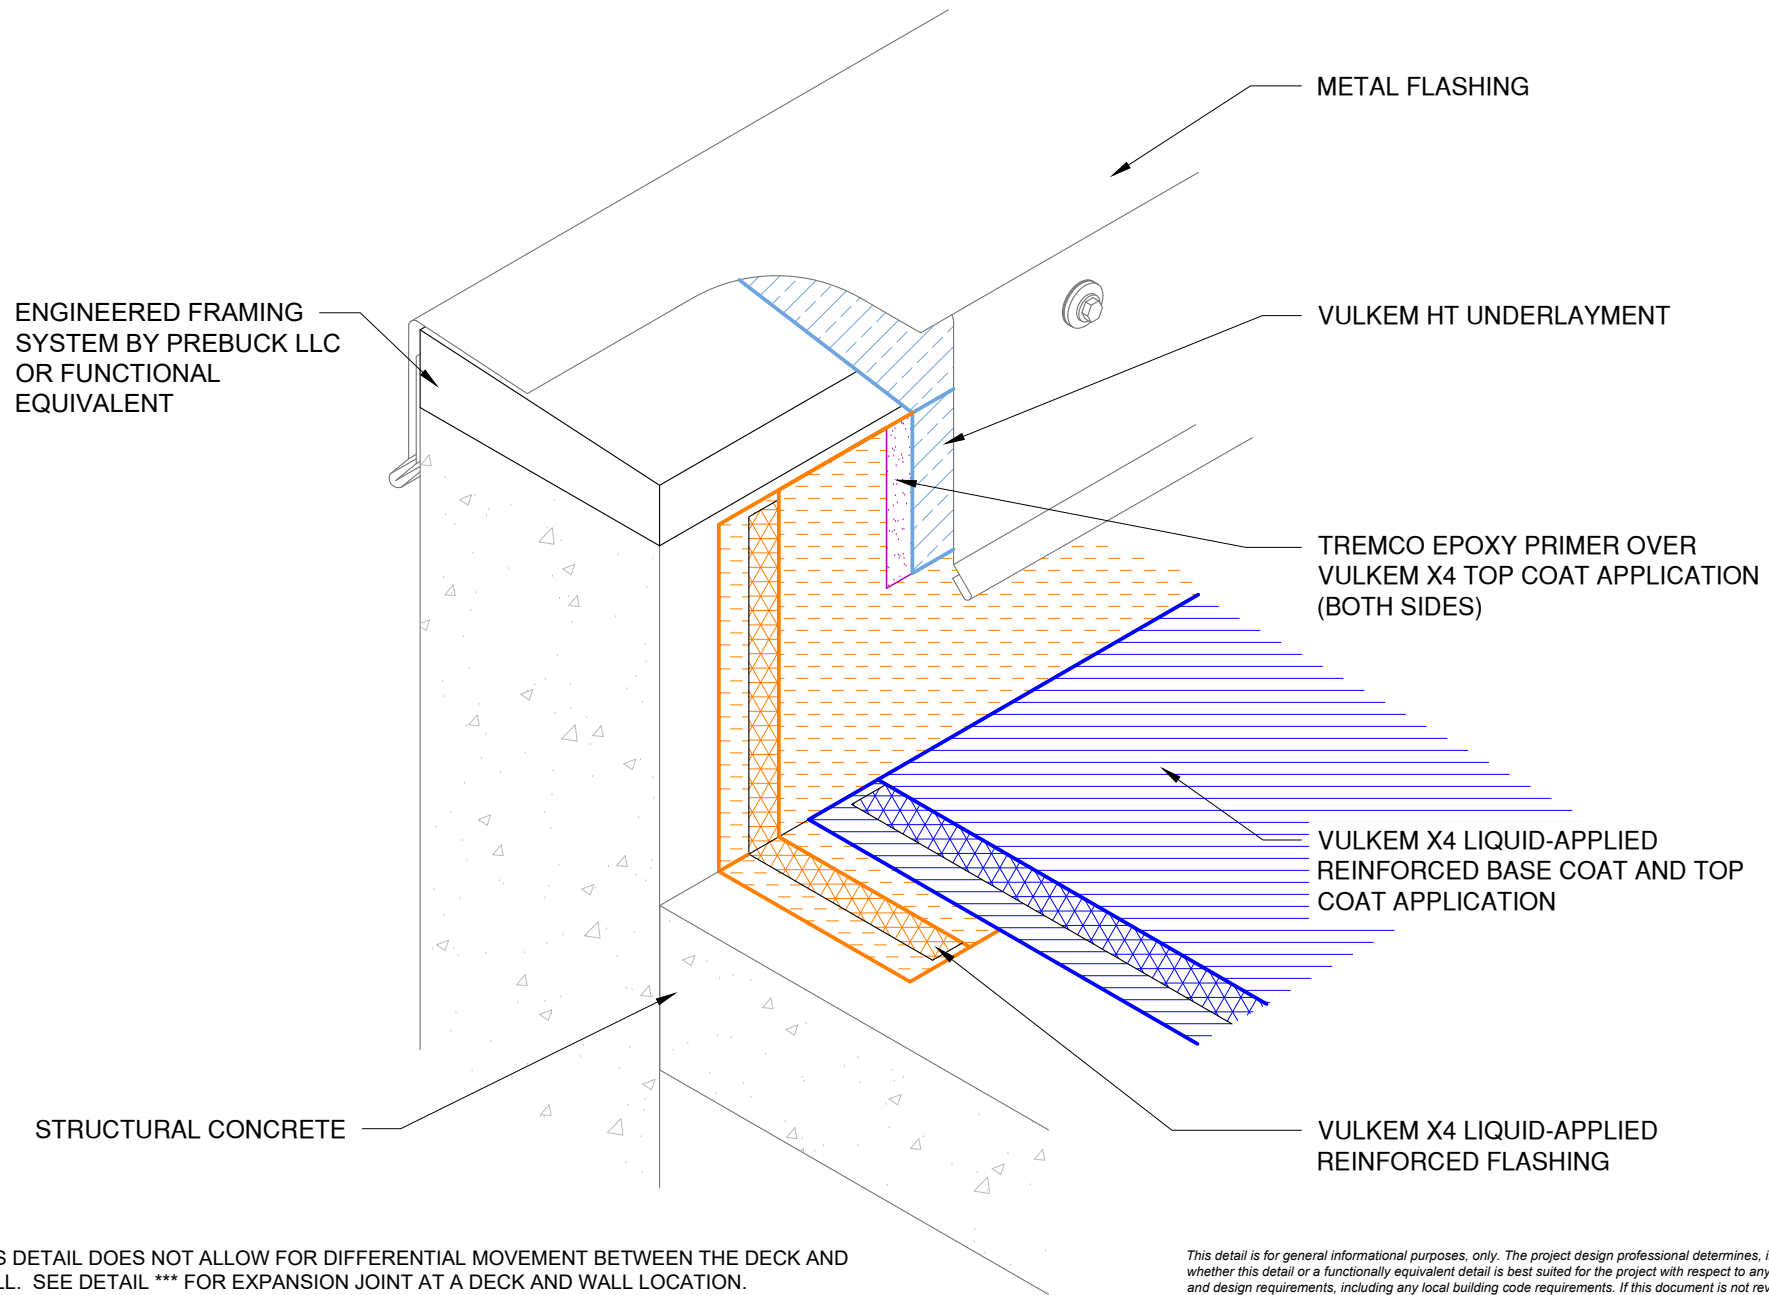

Vulkem X4

Detail: Base Flashing at Parapet Wall with Metal Coping Fully Reinforced over Concrete

File Name:

Drawn by: KAB

Checked by: TH

Scale: NTS

V-X4-G-01

Revision #: 00

Revised by: -

Date: 8/15/2025




Tremco Technical Support: 866-209-2404

www.tremcocpg.com



Construction Products Group

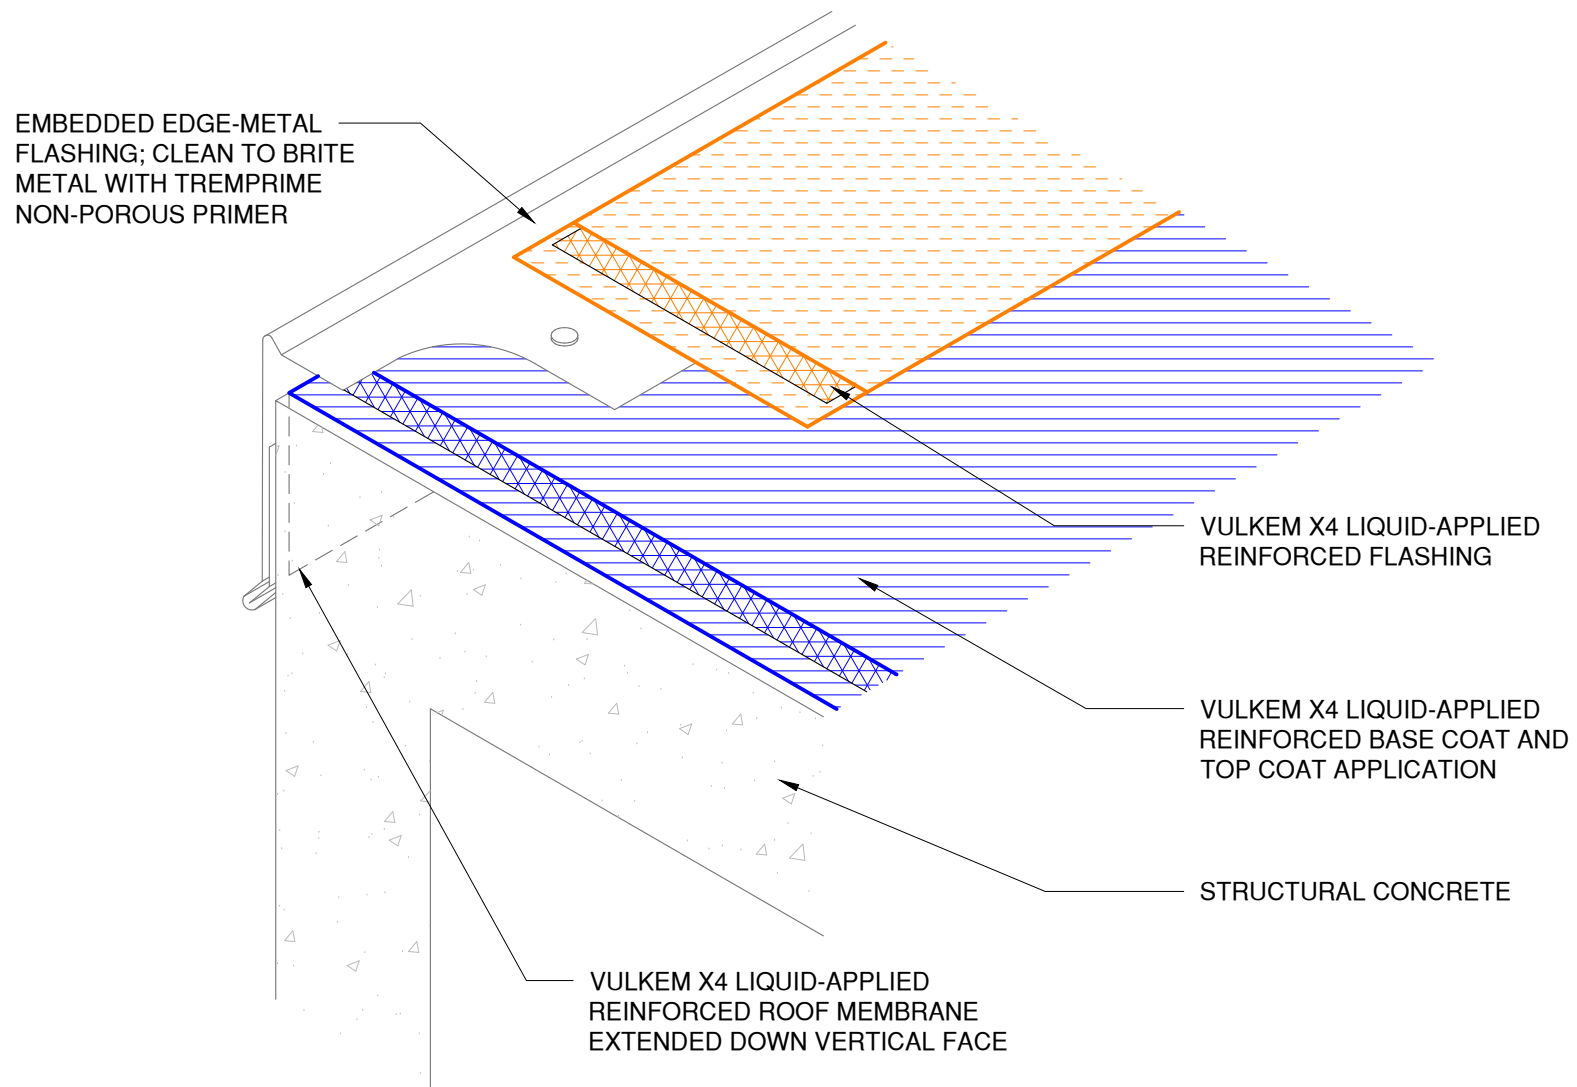

NOTES:

1. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Vulkem X4

Detail: Embedded Edge-Metal Flashing (Gravel Stop) Fully Reinforced over Concrete

File Name:

Drawn by: KAB

Checked by: TH

Scale: NTS

V-X4-G-02

Revision #: 00

Revised by: -


Date: 8/15/2025



Tremco Technical Support: 866-209-2404

www.tremcocpg.com



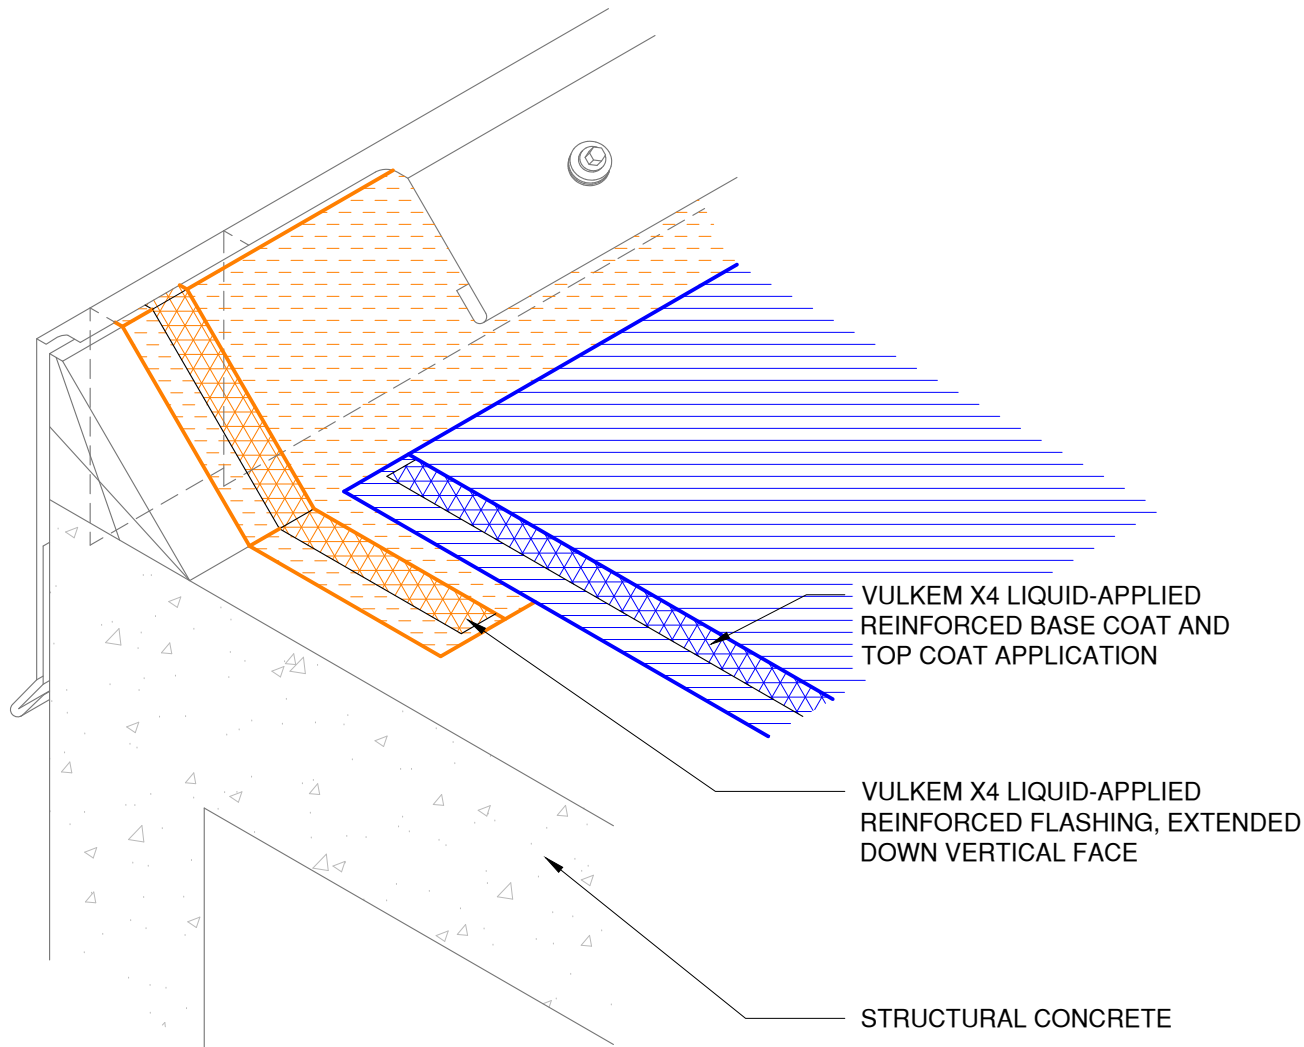

NOTES:

1. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Vulkem X4

Detail: Raised Perimeter Edge with Metal Flashing Fully Reinforced over Concrete

File Name:

Drawn by: KAB

Checked by: TH

Scale: NTS

V-X4-G-03

Revision #: 00

Revised by: -


Date: 8/15/2025



Tremco Technical Support: 866-209-2404

www.tremcocpg.com



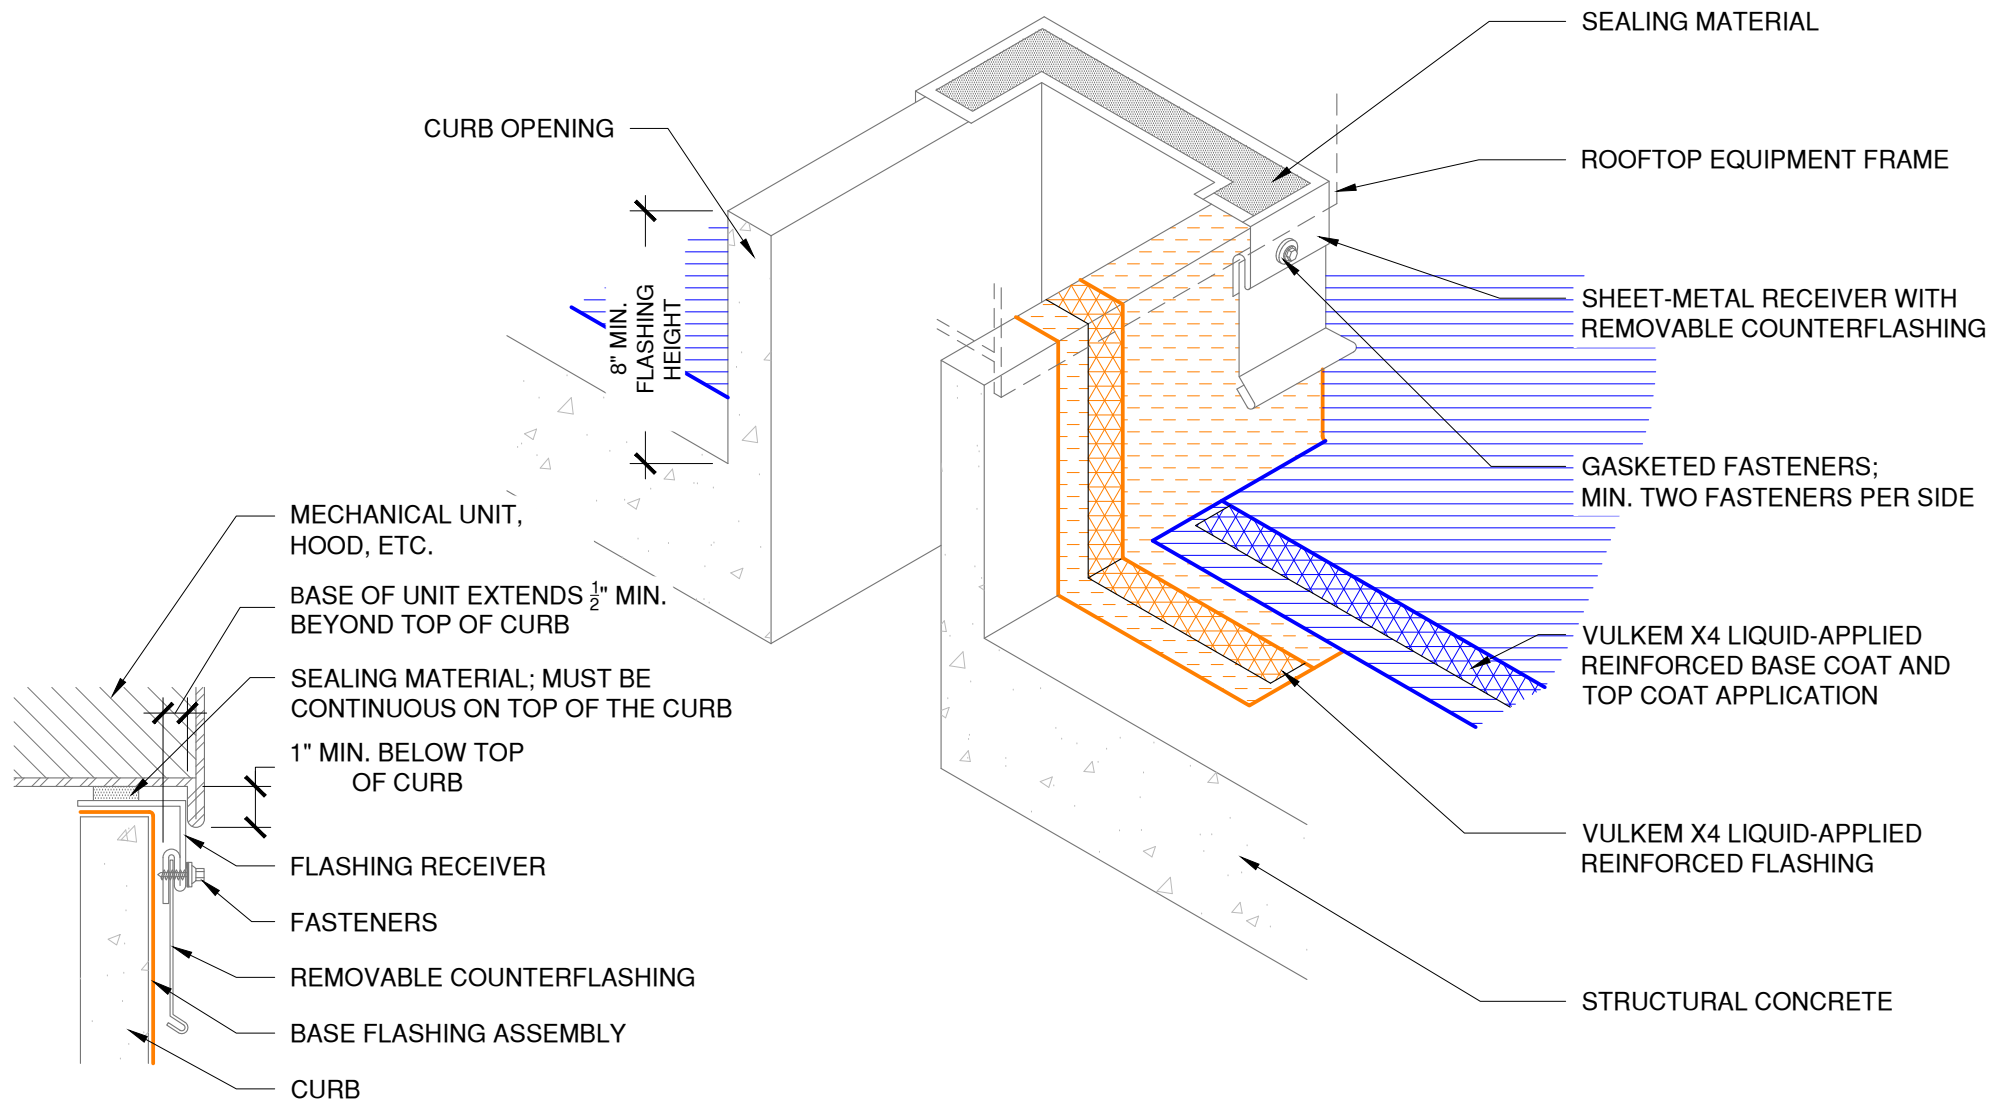

NOTES:

1. THE CURBS, TOP WOOD NAILER AND SEAL STRIP ARE TO BE SUPPLIED BY THE CURB MANUFACTURER.
2. WHEN POSSIBLE, THE MECHANICAL UNITS SHOULD NOT BE SET UNTIL THE ROOF MEMBRANE AND FLASHING HAVE BEEN INSTALLED.
3. WHERE THE SKYLIGHT, SCUTTLE OR SMOKE VENT FRAME OVERLAPS THE BASE FLASHING AT LEAST 3 INCHES, THE REMOVABLE SHEET-METAL COUNTERFLASHING IS NOT REQUIRED.
4. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Vulkem X4

Detail: Base Flashing at Wood Curb Fully Reinforced over Concrete

File Name:

Drawn by: KAB

Checked by: TH

Scale: NTS

V-X4-G-04

Revision #: 00

Revised by: -

Date: 8/15/2025




Tremco Technical Support: 866-209-2404

www.tremcocpg.com



Construction Products Group

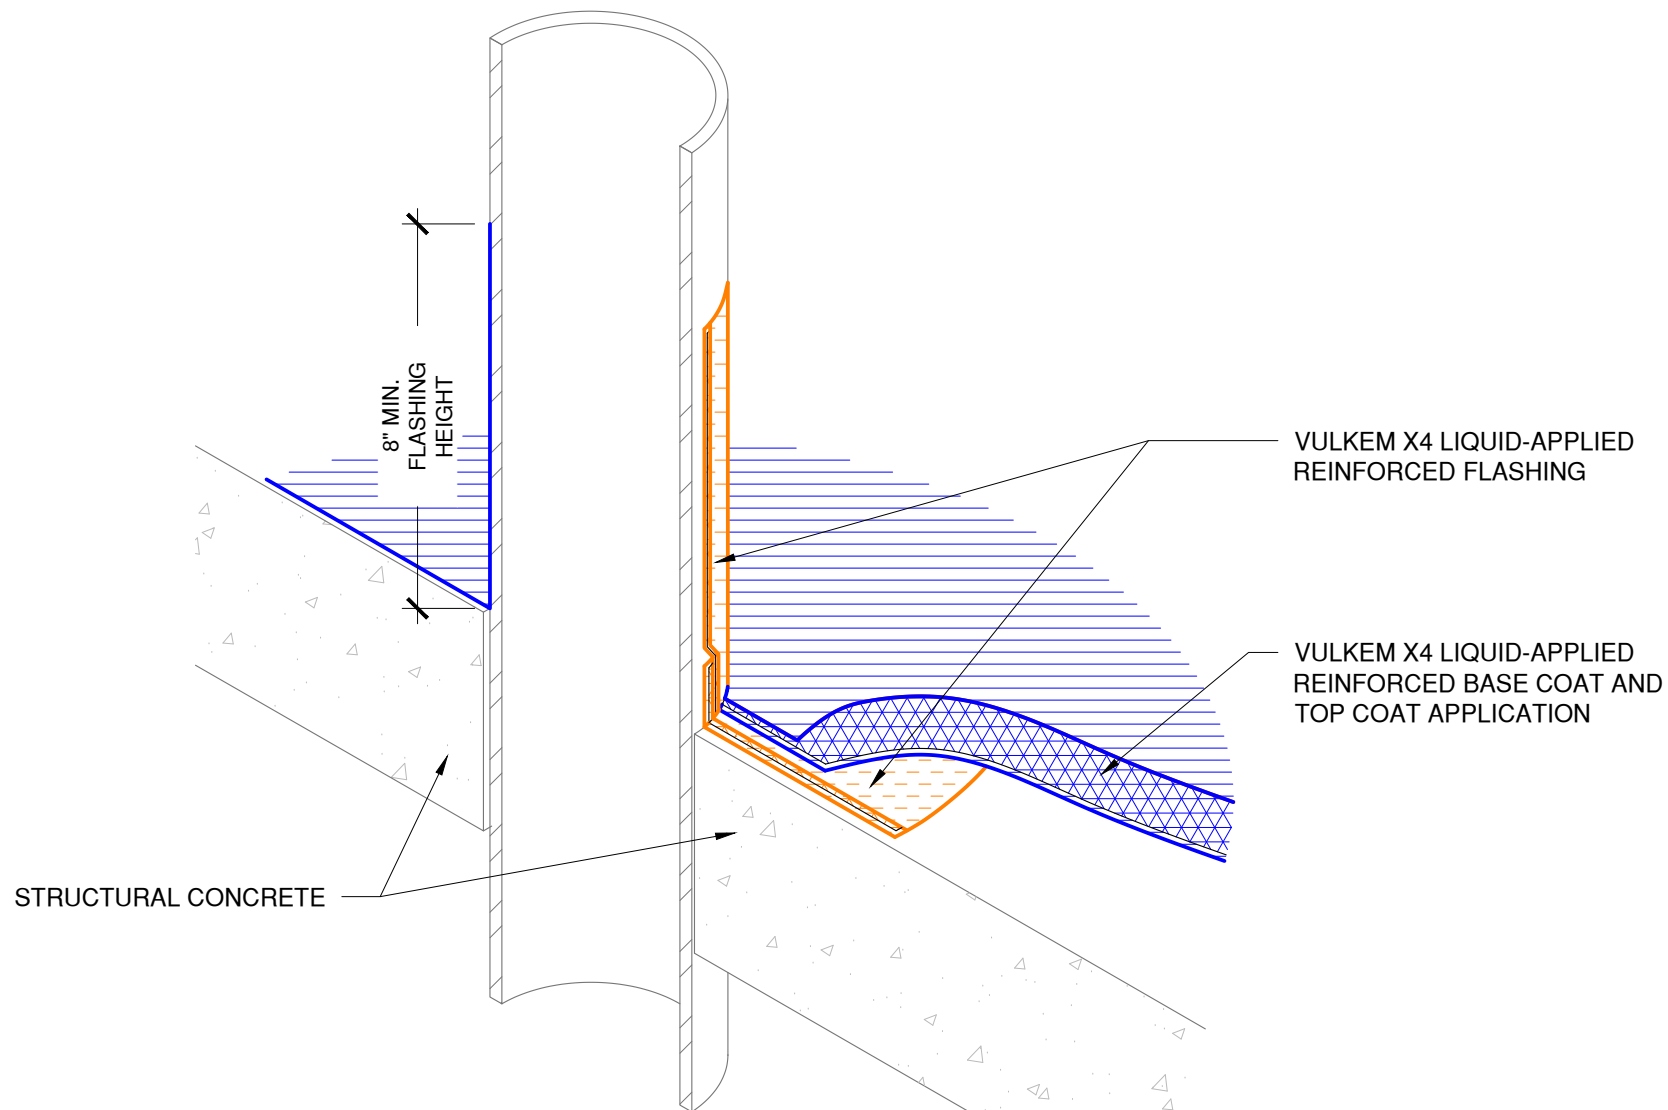

NOTES:

1. VENT STACKS AND OTHER IPES SHOULD HAVE A MINIMUM OF 12 INCHES OF CLEARANCE ON ALL SIDES FROM WALLS, CURBS AND OTHER PROJECTIONS TO FACILITATE PROPER FLASHING. SEE THE INTRODUCTION OF THE CONSTRUCTION DETAILS CHAPTER FOR ADDITIONAL INFORMATION.
2. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.

This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Vulkem X4

Detail: Plumbing Vent or Pip Penetration Fully Reinforced over Concrete

File Name:

Drawn by: KAB

Checked by: TH

Scale: NTS

V-X4-P-01

Revision #: 00

Revised by: -


Date: 8/15/2025



Tremco Technical Support: 866-209-2404

www.tremcocpg.com



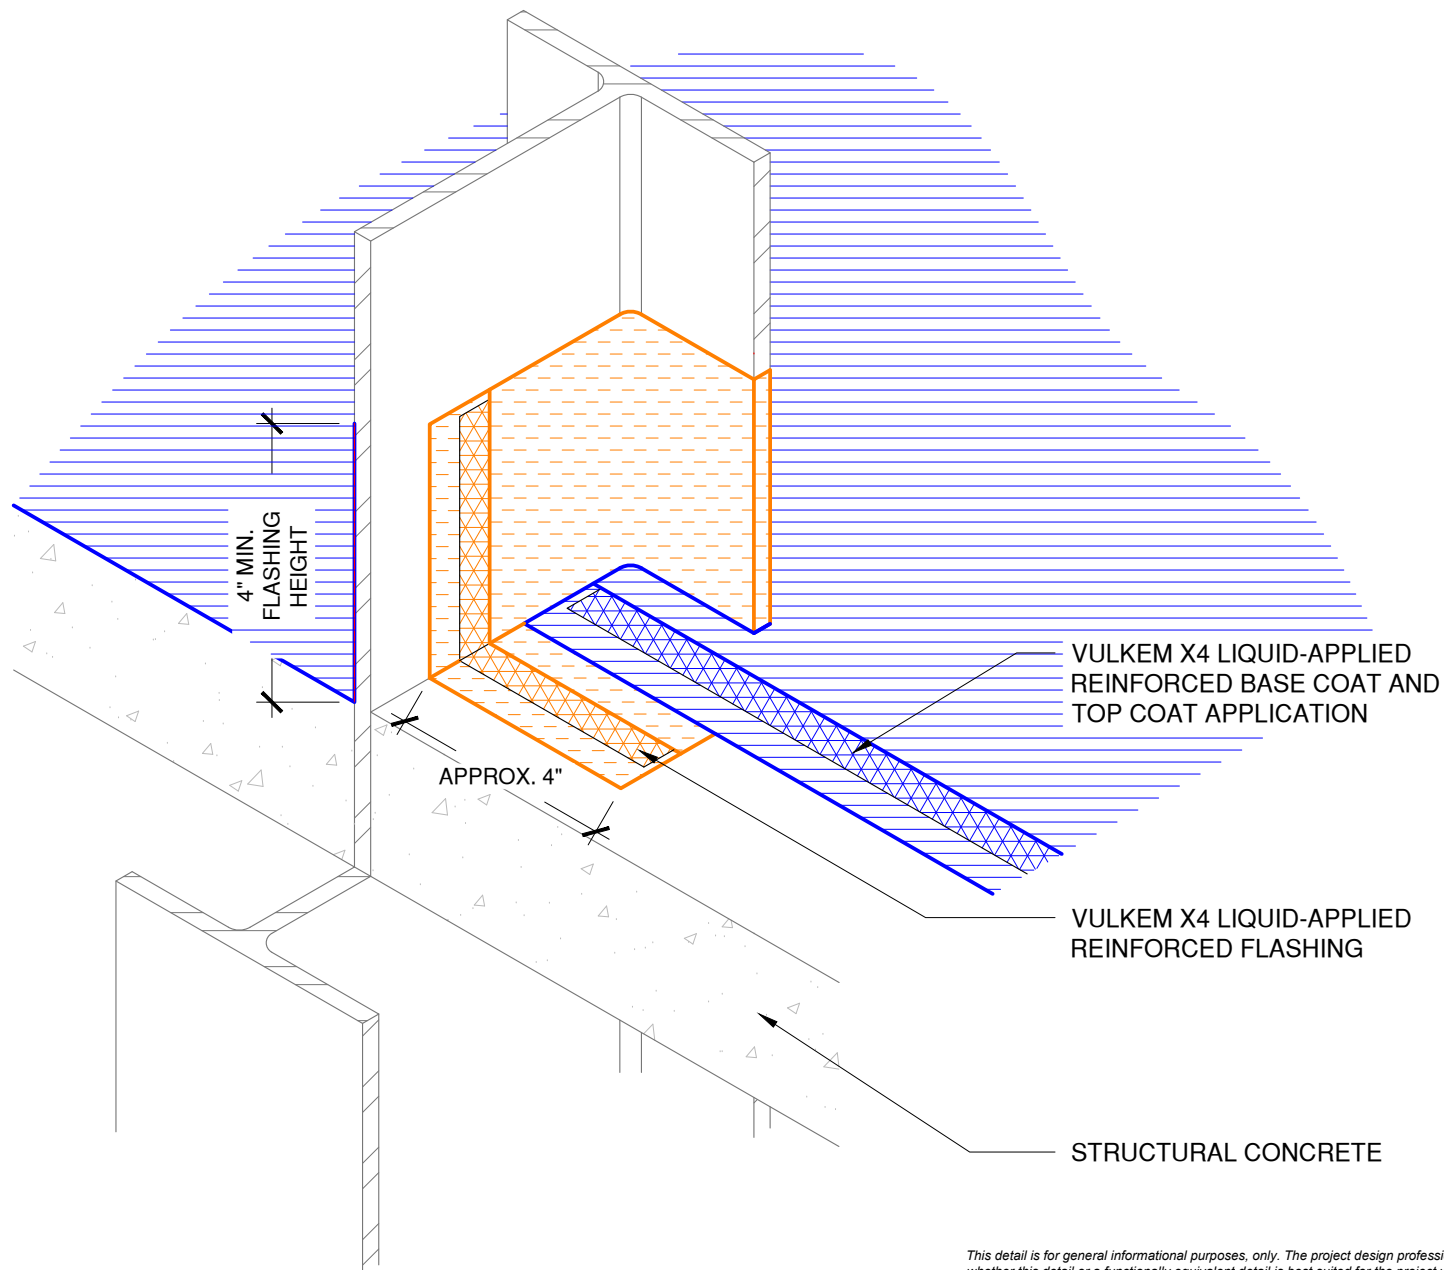

NOTES:

1. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Vulkem X4

Detail: Structural Roof Member Through Roof Deck Fully Reinforced over Concrete

File Name:

Drawn by: KAB

Checked by: TH

Scale: NTS

V-X4-P-02

Revision #: 00

Revised by: -

Date: 8/15/2025




Tremco Technical Support: 866-209-2404

www.tremcocpg.com



Construction Products Group

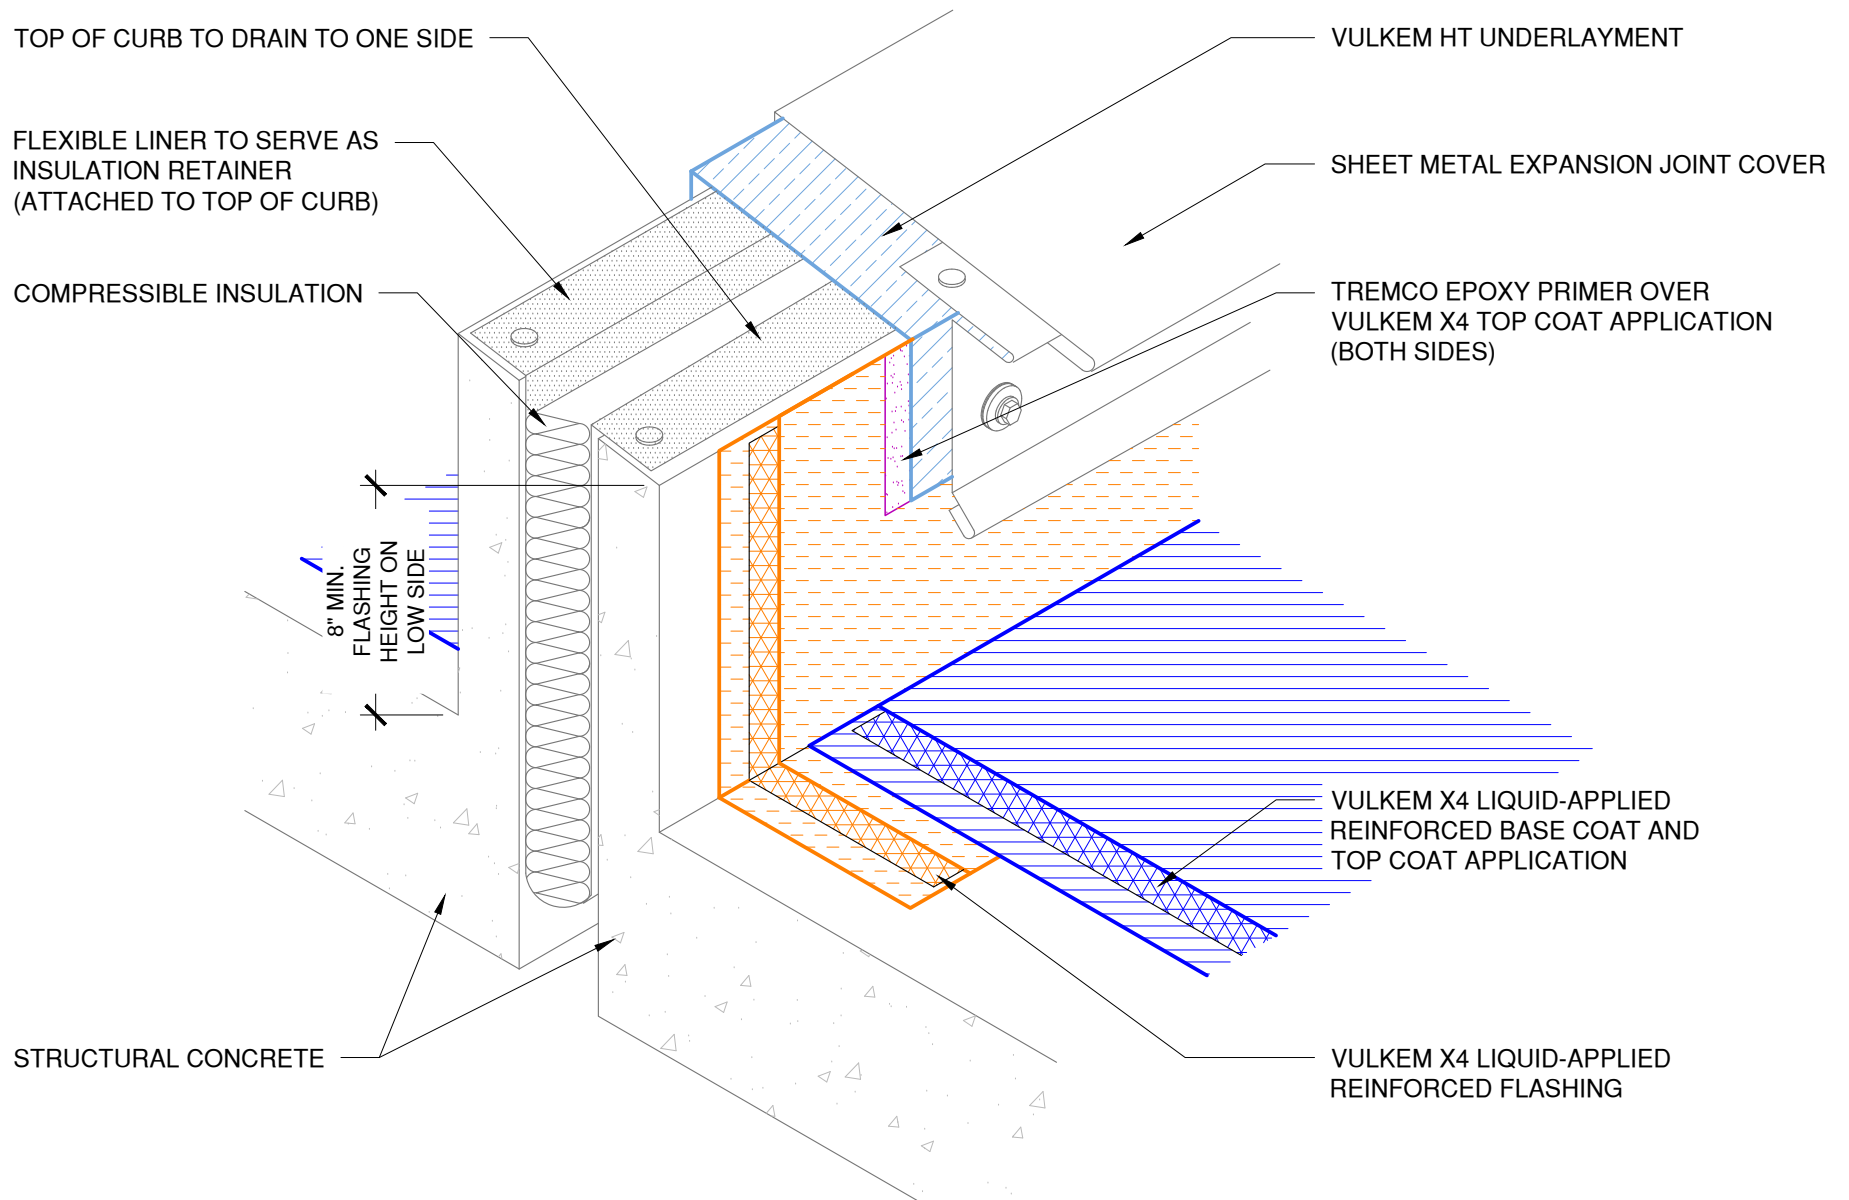

NOTES:

1. THIS DETAIL ALLOWS FOR BUILDING MOVEMENT IN MULTIPLE DIRECTIONS.
2. FLASHING REQUIREMENTS TYPICAL FOR BOTH SIDES OF THE EXPANSION JOINT.
3. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Vulkem X4

Detail: Base Flashing at Expansion Joint with Metal Cover Fully Reinforced over Concrete

File Name:

Drawn by: KAB

Checked by: TH

Scale: NTS

V-X4-EJ-01

Revision #: 00

Revised by: -

Date: 8/15/2025




Tremco Technical Support: 866-209-2404

www.tremcocpg.com



Construction Products Group

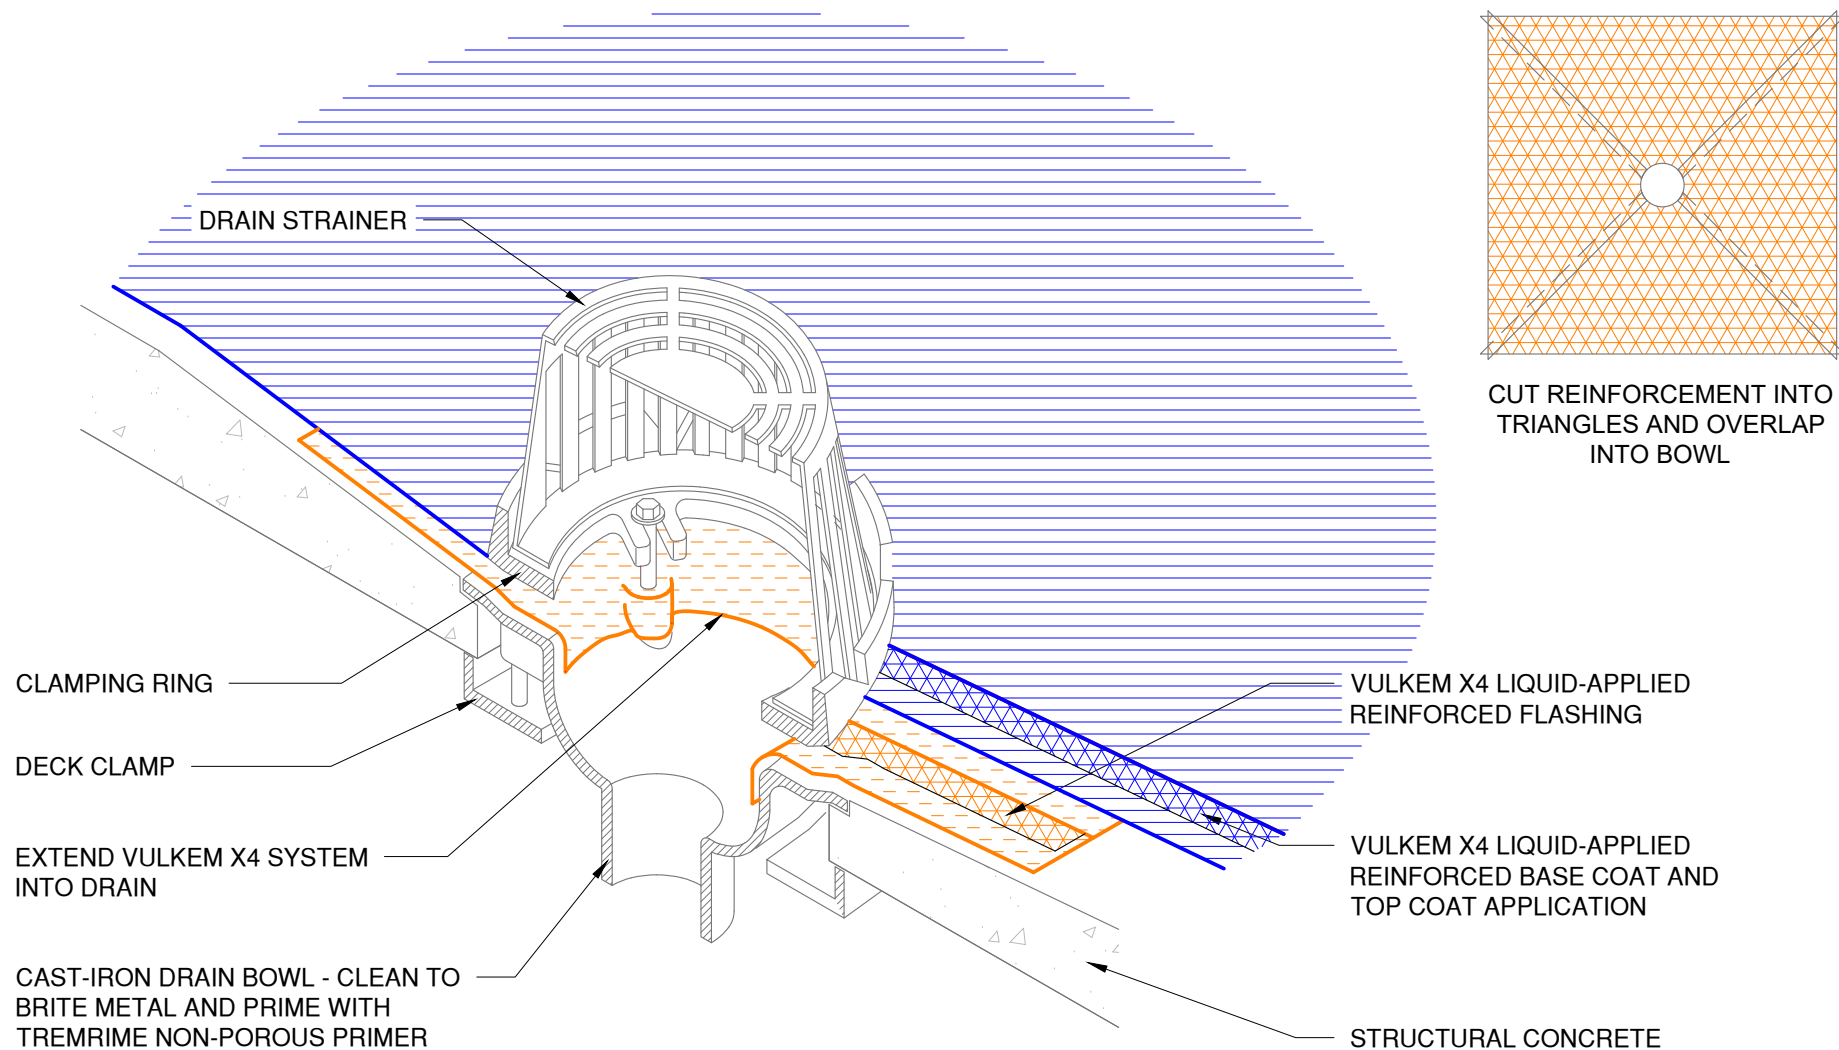

NOTES:

1. THE USE OF A METAL DECK SUMP PAN IS NOT RECOMMENDED. HOWEVER, DRAIN RECEIVER/BEARING PLATES ARE APPLICABLE WITH SOME PROJECTS.
2. THE DESIGNER SHOULD CONSIDER INSULATING THE DRAIN COMPONENTS BELOW THE DECK TO PREVENT POTENTIAL CONDENSATION.
3. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Vulkem X4



Tremco Technical Support: 866-209-2404

Detail: Roof Drain Fully Reinforced over Concrete

Drawn by: KAB

Checked by: TH

Scale: NTS

Revision #: 00

Revised by: -

Date: 8/15/2025

File Name:

V-X4-D-01



Construction Products Group

www.tremcocpg.com