


# TREMPROOF® PUMA DECORATIVE FLASHING SYSTEM

## Product Overview

TREMProof® PUMA Decorative Flashing Systems blend beautifully with the building façade and provide superior waterproofing protection — plus faster, easier installation versus stainless steel.

## Features & Benefits

- Field-tintable and custom color paks to match EIFS, brick or other building façade materials.
- Significant labor savings vs stainless steel flashing — no fabrication, bending, overlapping, soldering or open seams — and the ability to handle complex geometries with ease.
- Potential applications include curb-to-curtain wall, curb-to-facade, deck-to-door, balcony slider doors, exposed window flashings and more.
- Premium waterproofing system backed by an industry-leading warranty.
- System warranties available to include seamless connections to adjacent building envelope components for single-source, warranted, tested systems.
- Polyurethane-methacrylate (PUMA) technology delivers extreme durability and crack-bridging capabilities at critical connection points.
- Can be applied in temperatures as low as 14° F (-10° C)

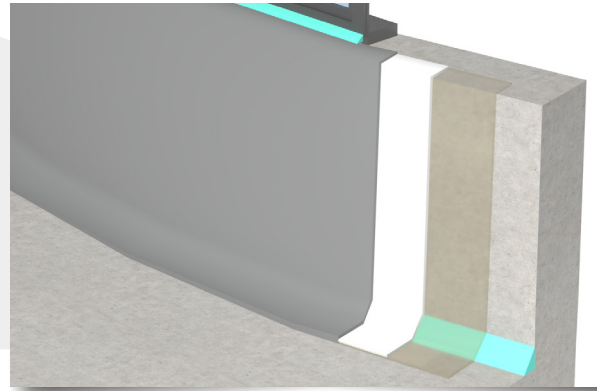

# TREMproof PUMA High-Performance Decorative Flashing Systems


FEATURES	TREMPROOF PUMA DECORATIVE FLASHING SYSTEMS	STAINLESS STEEL FLASHING SYSTEMS
Seamless/Monolithic	✓	
Industry-Leading Warranty	✓	
Waterproofing Capability	✓	
Easily Accomodates Complex Geometries	✓	
Durable	✓	✓
Fully-Bonded	✓	
Crack-Bridging	✓	
Low-Temperature Installation	✓	✓

*TREMproof PUMA For Decorative Flashing Applications*



# TREMproof PUMA Decorative Flashing System

PRODUCT	COVERAGE RATE	MIN. WET MILS	COMMENTS
1: Dymonic® 100 or Tremco PUMA BC T	N/A	N/A	N/A.
2: Tremco PUMA Primer	90 ft <sup>2</sup> /gal	17	Lightly broadcast silica sand.
3: Tremco PUMA Flashing	40 ft <sup>2</sup> /gal	40	Allow 45 min to cure.
4: Tremco PUMA TC	80 ft <sup>2</sup> /gal	20	Allow 45 min to cure.
5: Spectrem® 2	N/A	N/A	N/A

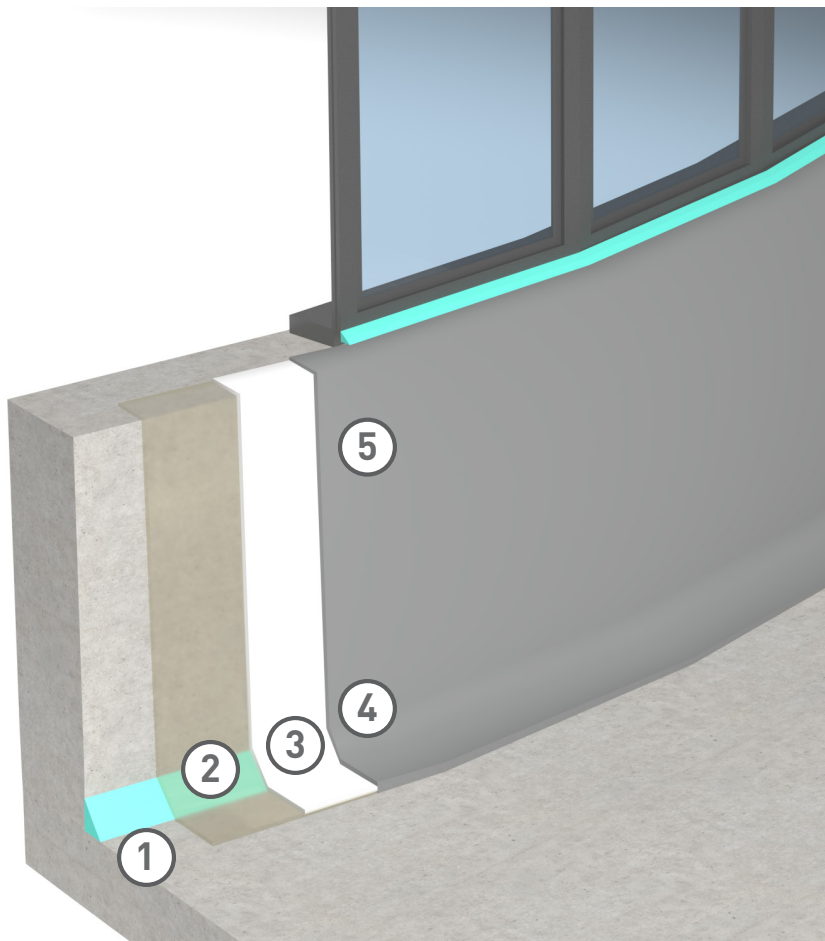

For specific information, please reference the application instructions or contact your local Tremco representative. To confirm tie-in compatibility, contact Tremco Technical Service.

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.



Tremco®, TREMproof®, Dymonic® and Spectrem® are registered trademarks of Tremco Incorporated. Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

1220/TPPDFSS

[tremcocpg.com](http://tremcocpg.com)