

#### Product Description

Dymonic® 100 is a high-performance, high-movement, single-component, medium-modulus, low-VOC, UV-stable, non-sag polyurethane sealant.

#### Basic Uses

Dymonic 100 is a durable, flexible sealant that offers excellent performance in moving joints and exhibits tenacious adhesion once fully cured. Typical applications for Dymonic 100 include expansion and control joints, precast concrete panel joints, perimeter caulking (windows, doors, and panels), aluminum, masonry and vinyl siding. Dymonic 100 is also an excellent choice as a fluid applied flashing material in rough opening perimeters for fenestration/window, door and curtain wall applications.

#### Features and Benefits

- Can adhere to damp or green concrete and has a skin time of 2 hr with a tack-free time of 6 to 8 hr to significantly reduce dirt attraction.
- Movement capability of +100/-50% in typical field conditions, is low VOC, paintable, jet fuel-resistant, and will not crack, craze or yellow under extreme UV exposure.
- Suitable for water immersion and will not out gas.
- Formulated with an innovative polymer technology, similar to TREMproof® 250GC and Vulkem® 45SSL, Dymonic 100 is highly versatile and has a unique capability to adhere to damp or green concrete and will not out gas.
- Compatible and can be coated over with Tremco's Vulkem Deck Coatings, ExoAir® Air Barrier products and the cold, fluid-applied TREMproof® line of below-grade waterproofing products.

#### Availability

Dymonic 100 is immediately available from your local Tremco Sales Representative, distributor, or warehouse.

#### Coverage Rates

308' of joint per gallon for a 1/4" x 1/4" (6 mm x 6 mm) joint. For specific coverage rates that include joint size, and usage efficiencies, visit our website usage calculator at [www.tremcosealants.com](http://www.tremcosealants.com)

#### Packaging

- 10.1-oz (300-mL) cartridges
- 20-oz (600-mL) sausages

#### Colors

Almond, Aluminum Stone, Anodized Aluminum, Beige, Black, Bronze, Buff, Dark Bronze, Gray, Gray Stone, Hartford Green, Ivory, Light Bronze, Limestone, Natural Clay, Off White, Precast White, Redwood Tan, Sandalwood, Stone, and White.

#### Shelf Life

1 year when stored at 40 to 110 °F (5 to 43 °C)

#### Storage

Store Dymonic 100 in original, undamaged packaging in a clean, dry, protected location with temperatures between 40 to 110 °F (5 to 43 °C).

#### Applicable Standards


- Dymonic 100 meets or exceeds the requirements of the following specifications:
- ASTM C920 Type S, Grade NS, Class 50, Use NT, T, M, A, O, I
- U.S. Federal Specification TT-S-00230C, Class A, Type II
- CAN/CGSB-19,13-M87
- International Code Council (ICC) Section R703.8 Flashing
- AAMA 714-15 Specification for Liquid-Applied Flashing
- NFPA 285 Listed Component

#### Fire Rated Systems

FF-D-1186, FW-D-1117, HW-D-1122, WW-D-1200, and BW-S-0006

#### Limitations

- Use with adequate ventilation.

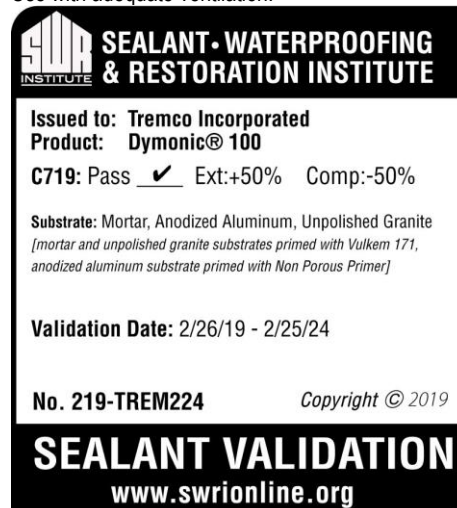

**SWRI INSTITUTE**  
**SEALANT · WATERPROOFING & RESTORATION INSTITUTE**

Issued to: **Tremco Incorporated**  
Product: **Dymonic® 100**  
C719: Pass  Ext:+50% Comp:-50%

Substrate: Mortar, Anodized Aluminum, Unpolished Granite  
*[mortar and unpolished granite substrates primed with Vulkem 171, anodized aluminum substrate primed with Non Porous Primer]*

Validation Date: 2/26/19 - 2/25/24

No. 219-TREM224 Copyright © 2019

**SEALANT VALIDATION**  
[www.swrionline.org](http://www.swrionline.org)

- Always utilize the accompanying MSDS for information on Personal Protective Equipment (PPE) and Health Hazards.
- Not recommended for use in chlorinated, potable, heavy or waste water.
- Although Dymonic 100 is paintable, this does not imply adhesion to and compatibility with all paints. Consult Tremco Technical Bulletin No. S-09-05 for more information.

#### Substrate Preparation

Surfaces must be sound and clean. All release agents, existing waterproofing, dust, loose mortar, paints, other finishes or field applied coating must be removed. This can be accomplished with a thorough wire brushing, grinding, sandblasting, or solvent washing, depending on the contamination.

Tremco recommends that surface temperatures be 40 °F (5 °C) or above at the time the sealant is applied. If sealant must be applied in temperatures below 40 °F, please refer to the Tremco Technical Bulletin for Applying Sealants in Cold Conditions (No. S-08-44 rev 1) that can be found on our website at [www.tremcosealants.com](http://www.tremcosealants.com)

## Dymonic® 100

High-Performance, High Movement, Single-Component, Polyurethane Sealant

### Priming

Dymonic 100 typically adheres to common construction substrates without primers; anodized aluminum may require the use of primer. However, Tremco always recommends that a mock-up or field adhesion test be performed on the actual materials being used on the job to verify the need for a primer, proper cleaning and prep requirements. A description of the field adhesion test can be found in appendix X1 of ASTM C1193, Standard Guide for Use of Joint Sealants.

Where deemed necessary, use Vulkem® Primer #191 Low-VOC on porous substrates and TREMprime® Non-Porous Primer for metals or plastics.

### Application

Dymonic 100 is easy to apply with conventional caulking equipment. Ensure that the backer rod is fitted properly for friction and that any necessary primers have been applied.

Fill the joint completely with a proper width-to-depth ratio, and then tool to ensure intimate contact of sealant with joint substrates.

Dry tooling is always preferred, although compatible wetting agents can be used in limited amounts to slick the spatula if needed after an initial pass.

For a cleaner finish, mask the sides of the joint with tape prior to filling.

### Joint Design


Dymonic 100 may be used in vertical or horizontal joints designed in accordance with accepted architectural/engineering practices. Joint width should be 4 times anticipated movement but not less than 1/4" (6 mm).

### Joint Backing

Polyethylene backer rod is recommended as joint backing to control sealant depth and ensure intimate contact of sealant with joint substrate when tooling. Where depth of joint will prevent the use of backer rod, an adhesive backed polyethylene tape (bond breaker tape) should be used to prevent three-sided adhesion. All backing should be dry at the time of sealant application.

### Sealant Dimensions

W = Sealant width, D = Sealant depth, C = Contact area.

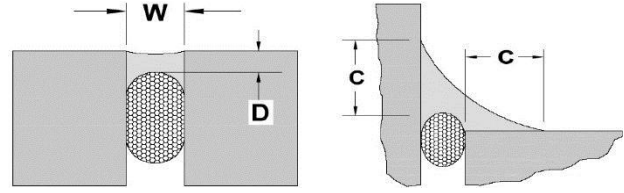

**Expansion Joints-** The minimum width and depth of any sealant application should be 1/4" x 1/4" (6 mm x 6 mm). The depth (D) of sealant may be equal to width (W) of joints less than 1/2" wide. For joints from 1/2" to 1" (13 mm to 25 mm) wide, the sealant depth should be approximately one-half of the joint width. The maximum depth (D) of any sealant application should be 1/2" (13 mm). For Joints that are wider than 1" (25 mm) contact Tremco Technical Services or your local Tremco Sales Representative.

**Window Perimeter-** For fillet beads, or angle beads around windows and doors, the sealant should exhibit a minimum surface contact area [C] of 1/4" (6 mm) onto each substrate, with provisions for release at the heel of the angle using backer rod or bond breaker tape.

### Cure Time

Dymonic 100 generally cures at a rate of 3/32" per day at 75 °F (24 °C) and 50% RH. It will skin in 2 hr and be tack free in 6 to 8 hr. The cure time will increase as temperatures and/or humidity decrease. A typical rule of thumb is one additional day for every 10 °F decrease in temperature.

### Clean Up

Excess sealant and smears adjacent to the joint interface can be carefully removed with xylene or mineral spirits before the sealant cures. Any utensils used for tooling can also be cleaned with xylene or mineral spirits.

### Warranty

Tremco warrants its Products to be free of defects in materials, but makes no warranty as to appearance or color. Since methods of application and on-site conditions are beyond our control and can affect performance, Tremco makes no other warranty, expressed or implied including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE with respect to Tremco Products. Tremco's sole obligation shall be, at its option, to replace or refund the purchase price of the quantity of Tremco Products proven to be defective, and Tremco shall not be liable for any loss or damage.

Please refer to our website at [www.tremcosealants.com](http://www.tremcosealants.com) for the most up-to-date Product Data Sheets.

NOTE: All Tremco Safety Data Sheets (SDS) are in alignment with the Globally Harmonized System of Classification and Labelling of Chemicals (GHS) requirements.

**Dymonic® 100**

High-Performance, High Movement, Single-Component, Polyurethane Sealant

**TYPICAL PHYSICAL PROPERTIES**

PROPERTY	TEST METHOD	TYPICAL VALUES
Type		Single component polyurethane sealant
Color		21 Standard Colors
Solids		98%
Specific Gravity		1.3302
Application		gun-grade sealant, applied with typical caulking equipment
Rheological Properties	ASTM C639	non-sag (NS), 0" of sag in channel
Hardness Properties	ASTM C661	40 +/-5
Weight Loss	ASTM C1246	Pass
Skin Time	ASTM C679	2 to 3 hr
Tack Free Time	73.4°F (23°C) 50% RH	6 to 8 hr
Stain and Color Change	ASTM C510	Pass
Adhesion to Concrete	ASTM C794	35 pli
Adhesion to Concrete After Immersion	ASTM C794	30 pli
Adhesion to Green Concrete	ASTM C794	>25 pli
Adhesion to Damp Concrete	ASTM C794	>20 pli
Effects of Accelerated Aging	ASTM C793	Pass
Movement Capability	ASTM C719	+/-50%
Movement Capability	ASTM C719* Modified	+100/-50%
Tensile Strength	ASTM D412	350 to 450 psi
% Elongation	ASTM D412	800 to 900%
Modulus at 100%	ASTM D412	75 to 85 psi
Tear Strength	ASTM D412	65 to 75 psi
Service Temperature		-40 to 180 °F (-40 to 82 °C)
Application Temperature		40 to 100 °F (4 to 37 °C) *
Smoke Development	ASTM E84	5
Fire Spread	ASTM E84	5
Fire Resistance of Assembly	NFPA 285	PASS
Smoke Development	CAN S102	10
Fire Spread	CAN S102	10
Crack Bridging	ASTM C1305	PASS
Nail Sealability	ASTM D1970 Section 7.9	PASS

\*For temperatures below 40 °F, please refer to the Technical Bulletin, Cold Temperature Sealant Application Recommendations.

**0419/D100DS-ST**Please refer to our website at [www.tremcosealants.com](http://www.tremcosealants.com) for the most up-to-date Product Data Sheets.**Tremco Commercial Sealants & Waterproofing**

3735 Green Rd  
Beachwood OH 44122  
216.292.5000 / 800.321.7906

1451 Jacobson Ave  
Ashland OH 44805  
419.289.2050 / 800.321.6357

220 Wicksteed Ave  
Toronto ON M4H1G7  
416.421.3300 / 800.363.3213

1445 Rue de Coulomb  
Boucherville QC J4B 7L8  
514.521.9555